

TKS & TKB ACTUATORS

SCREW DRIVE & BELT DRIVE

 **ENDURANCE TECHNOLOGY**™



LINEAR SOLUTIONS MADE EASY

Tolomatic TKS & TKB Electric Rodless Actuators



High Precision Rodless Actuators

The TKS and TKB linear table style actuators are designed for applications carrying moderate load and requiring high precision in parameters such as flatness, straightness and accuracy. Both the TKS and TKB actuators utilize two parallel profiled rails with four recirculating ball linear guides to provide consistent and precise performance. Built-to-order in stroke lengths up to 96 inches.

A Comparison of Screw Drive Actuators

	TKS	B3S	MXE-S	MXE-P
				
Features:	Superior rigidity, high moment load capacities	High load and bending moment capacities	Basic guidance and support	High load and bending moment capacities
Load up to: <i>(with options)</i>	1,500 lbf [6,672 N]	8,000 lbf [35,586 N]	1,040 lbf [4,626 N]	2,584 lbf [11,494 N]
Thrust up to:	3,260 lbf [14,501 N]	2,700 lbf [12,010 N]	4,300 lbf [19,127 N]	4,300 lbf [19,127 N]
Speed up to:	60 in/sec [1,524 mm/sec]	60 in/sec [1,524 mm/sec]	60 in/sec [1,524 mm/sec]	60 in/sec [1,524 mm/sec]
Stroke Length up to:	96 in [2,438 mm]	179 in [4,547 mm]	178 in [4,521 mm]	178 in [4,521 mm]
Screw/Nut Type	Solid & Ball	Solid & Ball	Solid & Ball	Solid & Ball
www.tolomatic.com for complete information, search by literature number:				
Literature Number:	3600-4609	3600-4176	8300-4000	8300-4000

(Not all models deliver ALL maximum values listed, i.e.: Maximum thrust may not be available with maximum speed)

A Comparison of Belt Drive Actuators

	TKB	B3W	MXB-U	MXB-P
				
Features:	Superior rigidity, high moment load capacities	High load and bending moment capacities	Basic thrust, requires external guidance and support	High load and bending moment capacities
Load up to: <i>(with options)</i>	1,500 lbf [6,672 N]	8,000 lbf [35,586 N]	NA	2,584 lbf [11,494 N]
Thrust up to:	245 lbf [1,090 N]	325 lbf [1,446 N]	418 lbf [1,859 N]	418 lbf [1,859 N]
Speed up to:	100 in/sec [2,540 mm/sec]	200 in/sec [5,080 mm/sec]	200 in/sec [5,080 mm/sec]	150 in/sec [3,810 mm/sec]
Stroke Length up to:	96 in [2,438 mm]	207 in [5,258 mm]	230 in [5,842 mm]	230 in [5,842 mm]
www.tolomatic.com for complete information, search by literature number:				
Literature Number:	3600-4609	3600-4176	8500-4000	8500-4000


(Not all models deliver ALL maximum values listed, i.e.: Maximum thrust may not be available with maximum speed)

TKS

TKB


TKS & TKB Applications

Storage & Retrieval

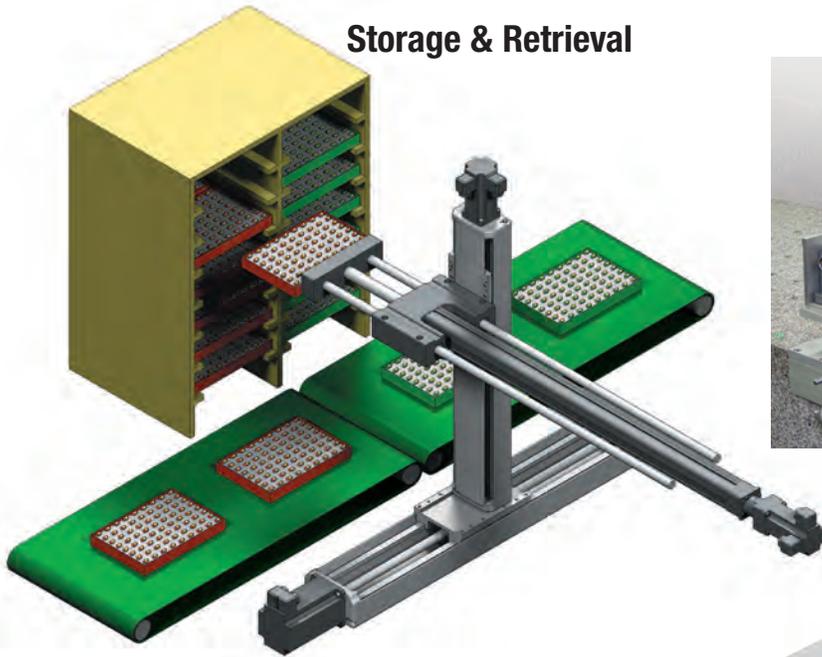

Inspection & Measurement

Custom Two Direction TKS

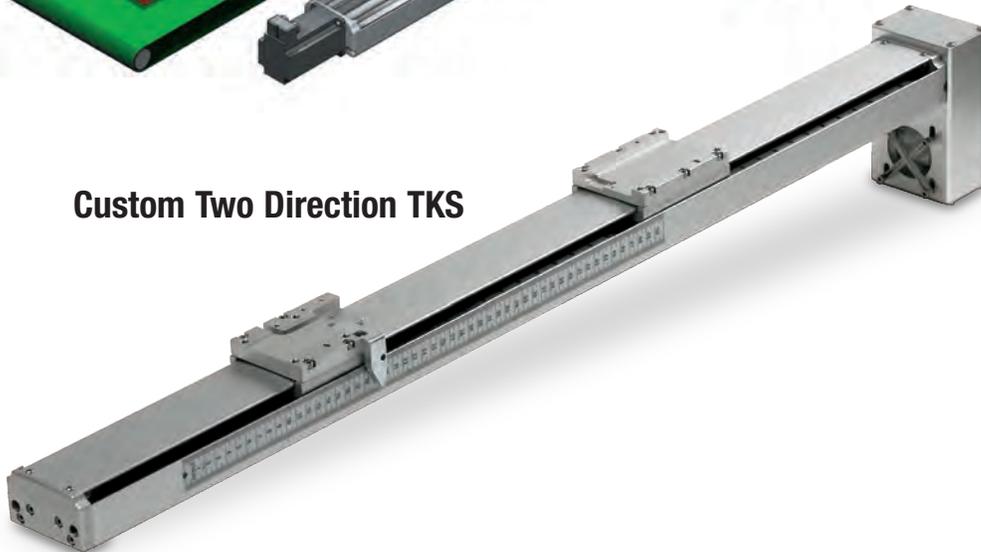

- Animation
- Assembly machinery
- Automotive
- Cosmetics
- Cycle testing
- Inspection & measurement
- Laser positioning
- Machine tools
- Material handling
- Medical equipment
- Packaging equipment
- Pick & place
- Precision grinders
- Product test simulations
- Semiconductor
- Stage motion control
- Table positioning
- Tension control
- Test stands
- Water jet control
- Wave generation
- and many more

Semiconductor Inspection



CONTENTS

Rodless Comparison TK_2

Applications..... TK_3

TKS Features..... TK_4

TKB Features TK_6

TKS & TKB Specs..... TK_8

TKS Specifications TK_15

TKB Performance..... TK_21

TKB Specifications TK_22

Switches TK_26

Application Data
Worksheet..... TK_28

Selection Guidelines TK_29

TKS Ordering TK_30

TKB Ordering TK_31

Other Tolomatic
Products..... TK_32

TKS

TKB

TKS PRECISION SCREW DRIVE ACTUATOR

ENDURANCE TECHNOLOGYSM

Endurance Technology features are designed for maximum durability to provide extended service life.

The TKS linear table style actuator is designed for applications carrying moderate load and requiring high precision in parameters such as flatness, straightness and accuracy. The TKS actuator utilizes two parallel profiled rails with four recirculating ball linear guides to provide consistent and precise performance. Built-to-order in stroke lengths up to 96 inches with your choice of screw technology.

PRECISION MACHINED TABLE DESIGN

- A low profile design accommodates multiple mounting designs and assures a rigid and secure load



SCREW SUPPORT BEARINGS

- Unique high thrust bearing assembly design eliminates runout and isolates the motor from axial forces

MULTIPLE SCREW TECHNOLOGIES YOU CAN CHOOSE:

- Solid nuts of engineered resins offer quiet performance at the lowest cost; anti-backlash available
- Ball nuts offer positioning accuracy and repeatability with longer life; low-backlash available



TWIN LINEAR RAILS AND BEARINGS

- Industry leading bearing system for consistent tracking, low friction and extended performance
- Superior straightness and flatness is verified at the factory below 0.0002 inches per inch
- Four bearing blocks provide rigid support of the carrier with the lowest possible deflection

INTERNAL SWITCHES

- End of travel and home positioning sensors are integral into the body of the actuator for clean and easy management



TKS

TKB

INTERNAL BUMPERS

- Bumpers protect the screw and nut assembly from damage at end of stroke

INTERNAL COUPLER

- Integral motor coupling for inline mounts provides a more compact package size

LIGHTWEIGHT ALUMINUM DESIGN

- Clear anodized extrusion design is optimized for rigidity and strength
- Mounting holes placed evenly throughout the stroke maintain rigidity



REMOVABLE COVER

- Provides rapid access to internal components and protects mechanisms from incidental damage



MOTOR ORIENTATION YOU CAN CHOOSE:

- Inline option directly couples the driving shafts and is a one-piece housing construction for optimum alignment and support of the motor
- Reverse-parallel option minimizes the overall length and offers a 1:1 or 2:1 belt ratio

OPTIONS



CARRIER OPTIONS

- **AUXILIARY CARRIER** Doubles the load capacity and increases pitch and yaw bending moment capacities



SEALING OPTIONS

- **BELLOWS** provides additional protection of mechanical components in dirty environments



SWITCHES

Styles include: reed or hall-effect. 15ft potted cable with flying leads

TKB PRECISION BELT DRIVE ACTUATOR

ENDURANCE TECHNOLOGYSM

Endurance Technology features are designed for maximum durability to provide extended service life.

The TKB linear table style actuator is designed for high speed applications requiring high precision in parameters such as flatness and straightness. This unique actuator utilizes two parallel profiled rails with four recirculating ball linear guides to provide wide and stable mounting surface with consistent and precise performance. The TKB belt-driven actuator features speeds up to 100 in/sec. and thrusts up to 245 lbf. Built-to-order in stroke lengths up to 96 inches.

MULTIPLE BELT TECHNOLOGIES YOU CAN CHOOSE:

- Polyurethane steel-cord reinforced HTD style belt (standard)
- Polyurethane Kevlar reinforced HTD style belt (Contact Tolomatic)

REMOVABLE COVER

- Provides rapid access to internal components and protects mechanisms from incidental damage



INTERNAL SWITCHES

- End of travel and home positioning sensors are integral into the body of the actuator for clean and easy management




PRECISION MACHINED TABLE DESIGN

- A wide and low profile design accommodates multiple mounting designs and assures a rigid and secure load



TKS

TKB

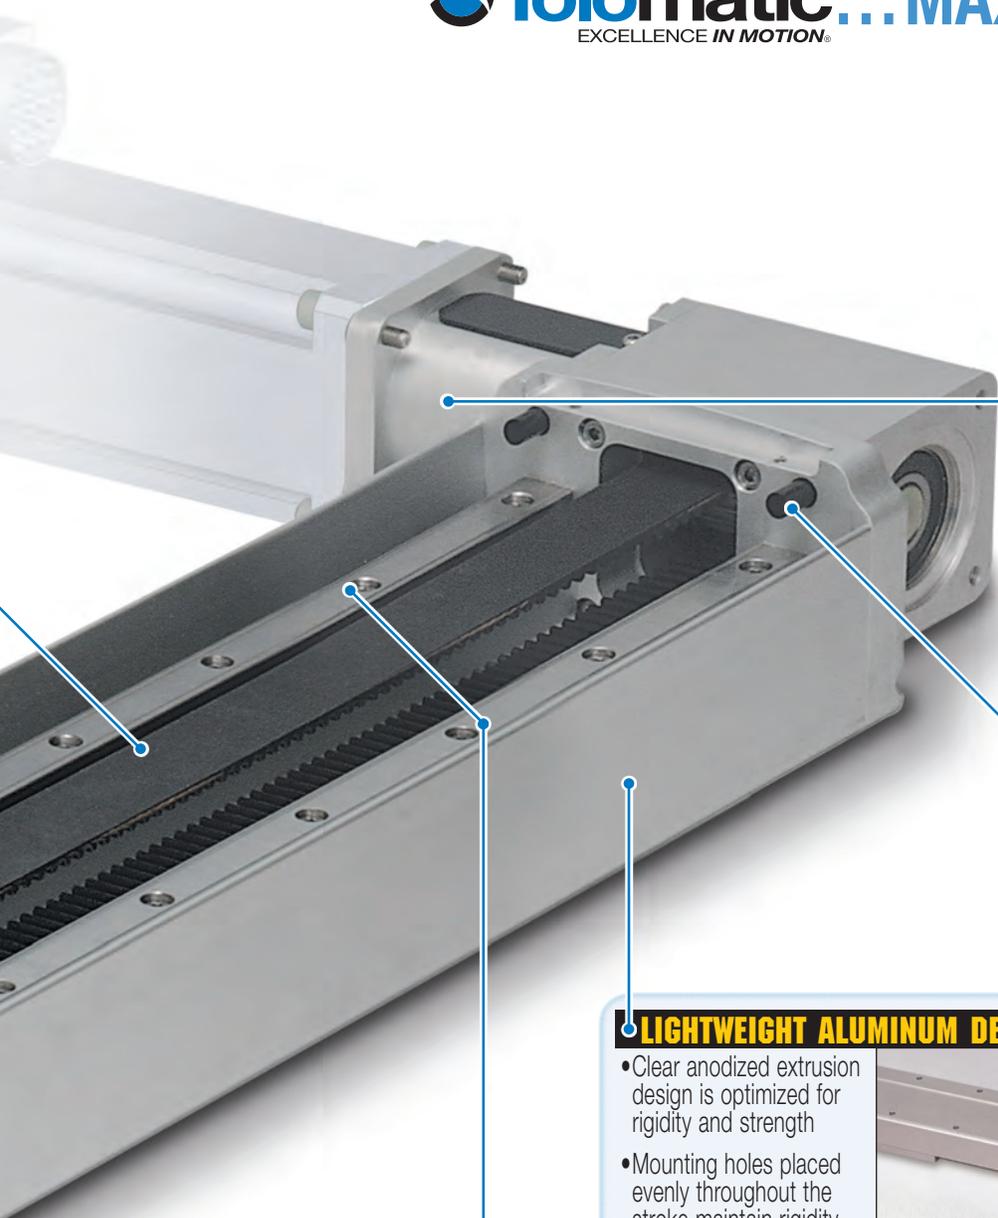

MOTOR ORIENTATION YOU CAN CHOOSE:

- Direct drive option directly couples the driving shafts and is a one-piece housing construction for optimum alignment and support of the motor
- Reduction drive option offers the ability to reduce the reflected inertia and lower the motor torque requirements

EXTERNAL BUMPERS

- External bumpers, both ends, are standard
- Protect actuator and load from damage

LIGHTWEIGHT ALUMINUM DESIGN

- Clear anodized extrusion design is optimized for rigidity and strength
- Mounting holes placed evenly throughout the stroke maintain rigidity



TWIN LINEAR RAILS AND BEARINGS

- Industry leading bearing system for consistent tracking, low friction and extended performance
- Superior straightness and flatness is verified at the factory below 0.0002 inches per inch
- Four bearing blocks provide rigid support of the carrier with the lowest possible deflection

OPTIONS



CARRIER OPTIONS

- **AUXILIARY CARRIER** Doubles the load capacity and increases pitch and yaw bending moment capacities



SEALING OPTIONS

- **BELLOWS** provides additional protection of mechanical components in dirty environments



SWITCHES

Styles include: reed or hall-effect. 15ft potted cable with flying leads

TKS

TKB

TKS & TKB Rodless Actuators

TKS & TKB SPECIFICATIONS

BENDING MOMENTS AND LOADS

STANDARD CARRIER		MAX. BENDING MOMENTS AND LOADS*								
		U.S. Conventional			Metric					
		Max. Dynamic Bending Moments			10	25	75	10	25	75
	Mx (Roll)	lb-in	85	721	1,151	<i>N-m</i>	9.6	81.5	130.0	
	My (Pitch)	lb-in	234	1,014	1,477	<i>N-m</i>	26.4	114.6	166.9	
	Mz (Yaw)	lb-in	234	915	1,332	<i>N-m</i>	26.4	103.4	150.5	
	Max. Dynamic Loads									
	Fy (Radial Load)	lb	100	250	750	<i>N</i>	445	1,113	3,338	
	Fz (Lateral Load)	lb	100	250	750	<i>N</i>	445	1,113	2,225	
	Fzr (Reverse Lateral Load)	lb	100	250	750	<i>N</i>	445	1,113	2,225	
	Max. Static Bending Moments									
	Mx (Roll)	lb-in	170	1,251	1,997	<i>N-m</i>	19.2	141.3	225.6	
	My (Pitch)	lb-in	468	1,759	2,563	<i>N-m</i>	52.9	198.8	289.5	
	Mz (Yaw)	lb-in	468	1,588	2,311	<i>N-m</i>	52.9	179.4	261.1	
	Max. Static Loads									
Fy (Radial Load)	lb	200	434	1,301	<i>N</i>	890	1,931	5,789		
Fz (Lateral Load)	lb	200	434	868	<i>N</i>	890	1,931	3,863		
Fzr (Reverse Lateral Load)	lb	200	434	868	<i>N</i>	890	1,931	3,863		
AUXILIARY CARRIER: Increases rigidity, load-carrying capacity and moments		U.S. Conventional			Metric					
		10DC	25DC	75DC	10DC	25DC	75DC			
	Max. Dynamic Bending Moments**									
	Mx (Roll)	lb-in	170	1,442	2,302	<i>N-m</i>	19.2	162.9	260.1	
	My (Pitch)	lb-in	563	1,733	3,875	<i>N-m</i>	63.6	195.7	437.8	
	Mz (Yaw)	lb-in	563	1,733	3,875	<i>N-m</i>	63.6	195.7	437.8	
	Max. Dynamic Loads									
	Fy (Radial Load)	lb	200	500	1,500	<i>N</i>	890	2,225	6,672	
	Fz (Lateral Load)	lb	200	500	1,500	<i>N</i>	890	2,225	6,672	
	Fzr (Reverse Lateral Load)	lb	200	500	1,500	<i>N</i>	890	2,225	6,672	
	Max. Static Bending Moments**									
	Mx (Roll)	lb-in	340	2,502	3,994	<i>N-m</i>	38	283	451	
	My (Pitch)	lb-in	1,126	3,006	6,723	<i>N-m</i>	127	340	760	
	Mz (Yaw)	lb-in	1,126	3,006	6,723	<i>N-m</i>	127	340	760	
Max. Static Loads										
Fy (Radial Load)	lb	400	868	2,603	<i>N</i>	1,780	3,863	11,583		
Fz (Lateral Load)	lb	400	868	1,735	<i>N</i>	1,780	3,863	7,721		
Fzr (Reverse Lateral Load)	lb	400	868	1,735	<i>N</i>	1,780	3,863	7,721		
Min. Dimension 'D'	in	5.63	6.93	7.75	<i>mm</i>	142.9	176	196.9		



* Bending moments & load specifications are based on 200,000,000 (5,000 KM) linear inches of carrier travel.

Breakaway torque will increase when using the Auxiliary carrier option. When ordering, determine your working stroke and enter this value into the configuration string. Overall actuator length will automatically be calculated.

Deflection Considerations: In applications where substantial M_x or M_y moments come into play, deflection of the cylinder tube, carrier and supports must be considered. The deflection factors shown in the Load Deflection charts, are based on cylinder mounted with tube supports at minimum recommended spacing. If more rigidity is desired, refer to the Auxiliary or Dual Carrier options.



** Loads shown in table are at minimum "D" dimension, for ratings with longer "D" dimension see graph on page TK_9.

TKS & TKB Rodless Actuators



TKS & TKB SPECIFICATIONS

LOAD DEFLECTION

X-AXIS DEFLECTION

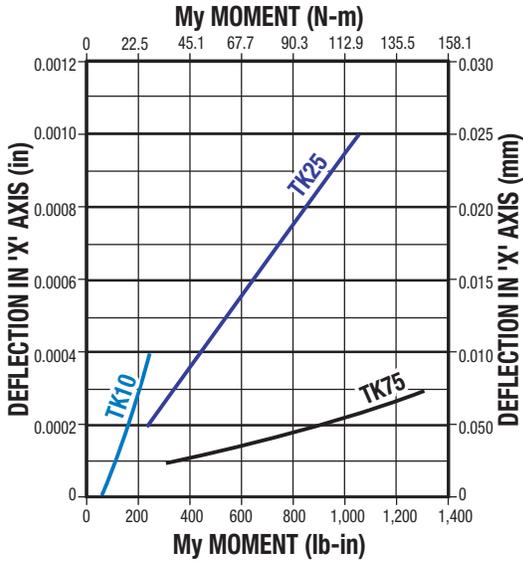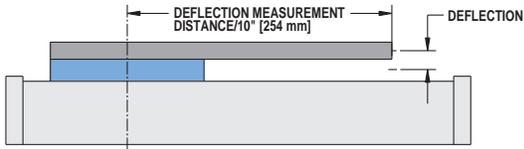


Y-AXIS DEFLECTION

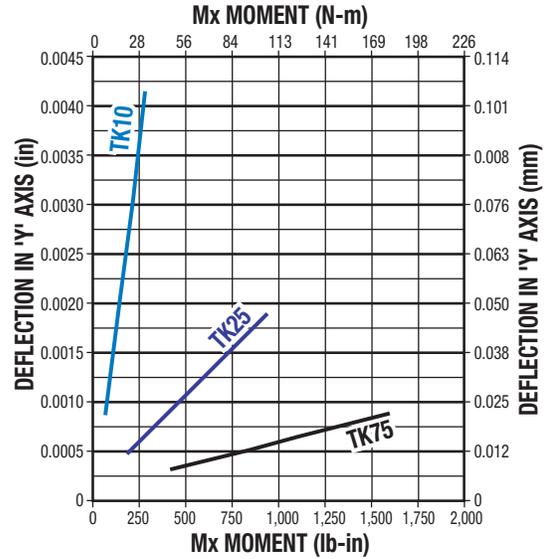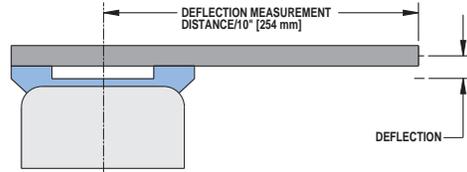


AUXILIARY CARRIER: BENDING MOMENT AT 'D' DISTANCE

DYNAMIC BENDING MOMENT

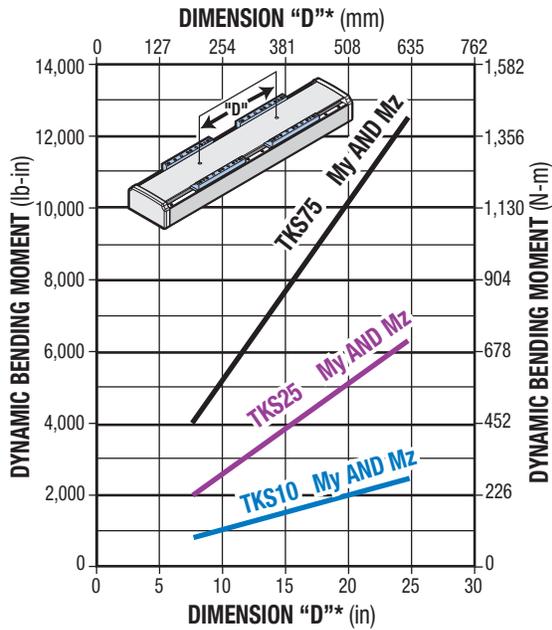

STATIC BENDING MOMENT

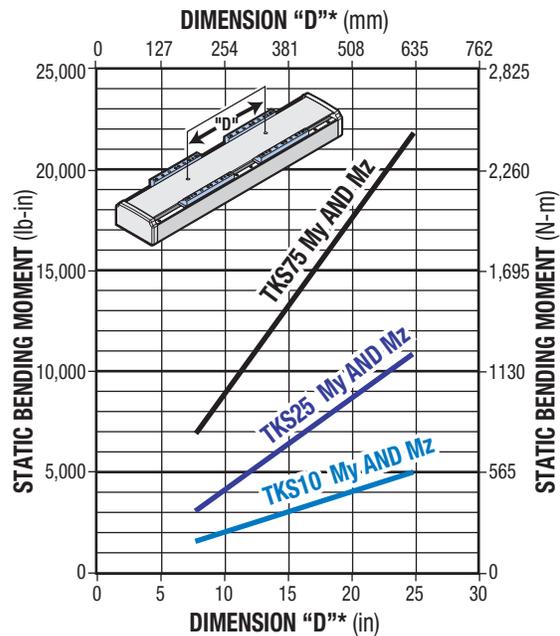

- Rates shown on charts were calculated with these assumptions:
- 1.) Coupling between carriers is rigid.
 - 2.) Load is equally distributed between carriers.
 - 3.) Coupling device applies no misalignment loads to carriers.

* Customer must specify Dimension "D" (Distance between carrier center lines) in configuration string.



See page TK_8 for minimum "D" dimension.


TKS

TKB

TKS & TKB Rodless Actuators

TKS & TKB SPECIFICATIONS

BELLOWS STROKE REQUIREMENTS


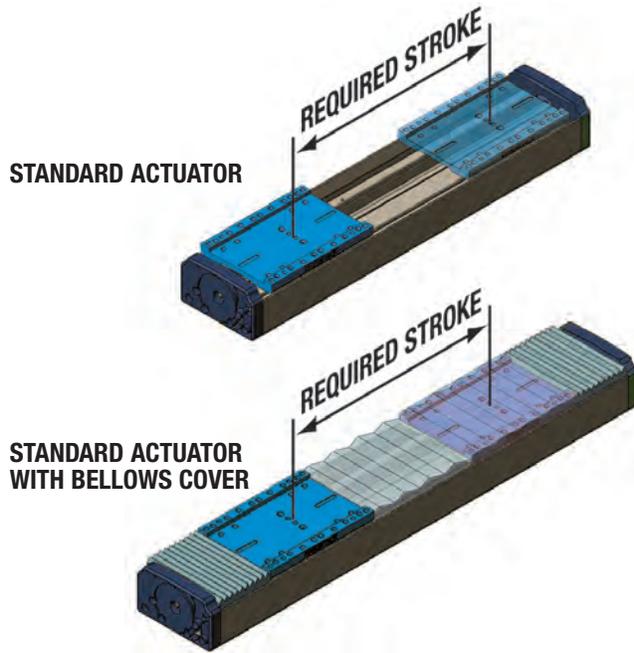


MAXIMUM AVAILABLE STROKE FOR BELLOWS OPTION

	TKS		TKB
	Ball Nut	Solid Nut	
10	24	64	64
<i>mm</i>	<i>610</i>	<i>1626</i>	<i>1626</i>
25	44	64	64
<i>mm</i>	<i>1118</i>	<i>1626</i>	<i>1626</i>
75	64	64	64
<i>mm</i>	<i>1626</i>	<i>1626</i>	<i>1626</i>

⚠ BELLOWS COVER OPTION INCREASES OVERALL ACTUATOR LENGTH BY 0.508 x STROKE

MOUNTING PLATE RECOMMENDATIONS

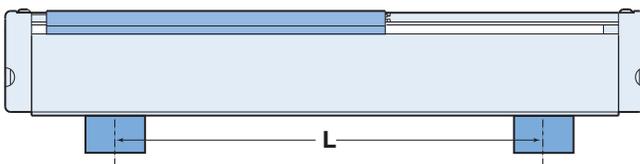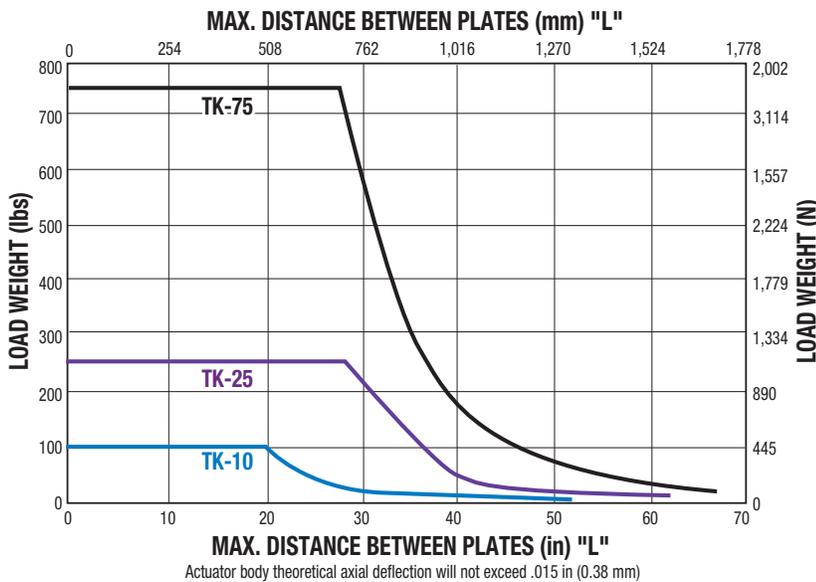

FRICITION FORCE

$$lbf = 0.0003 \times \text{LOAD (lb)} + 3.96$$

$$N = 0.003 \times \text{LOAD (kg)} + 17.6$$

LUBRICATION

Proper and adequate lubrication is essential for normal operation of TruTrack actuators. Poor lubrication will cause quicker wear and decrease service life of the actuator. For general use, lubrication should be performed at intervals of 4,000,000 linear inches of travel (100 km) or once every year, whichever occurs first. However, the operating conditions of certain applications may require more frequent lubrication. Please consult Tolomatic for recommendations.

Recommended greases:

- Multi-purpose grease based on refined mineral oil containing lithium thickening agent (excellent at high pressures, excellent viscosity stability).
- Grease based on a high-grade synthetic oil containing a urea thickening agent (long life, wide temperature range).


TKS

TKB

TKS Rodless Screw Drive Actuator

ACME SCREW/NUT COMBINATIONS

TKS ACME SCREW CRITICAL SPEED CAPACITIES

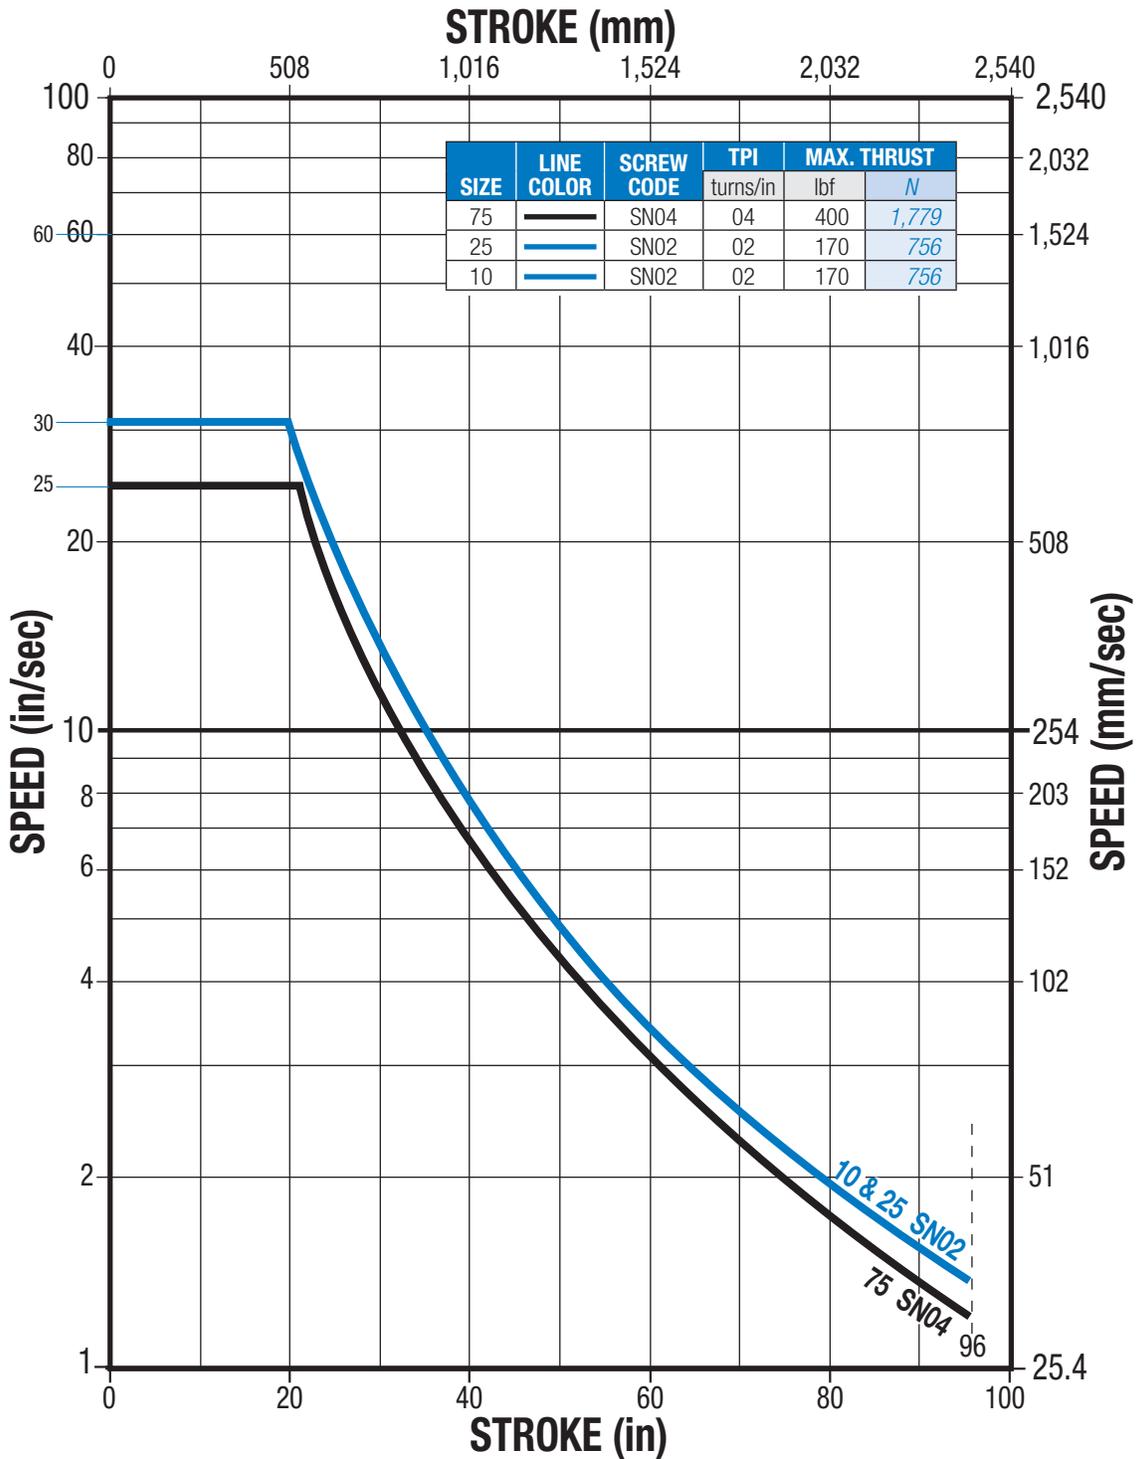

* For Acme screws, maximum thrust is the maximum continuous dynamic thrust subject to Thrust x Velocity limitation.

Dashed line represents maximum stroke for screw selections.

SCREW TYPE DESCRIPTION

SN Solid Nut
BN Ball Nut


TKS

TKB

TKS Rodless Screw Drive Actuator

ACME SCREW/NUT COMBINATIONS

TKS ACME SCREW PV LIMITS

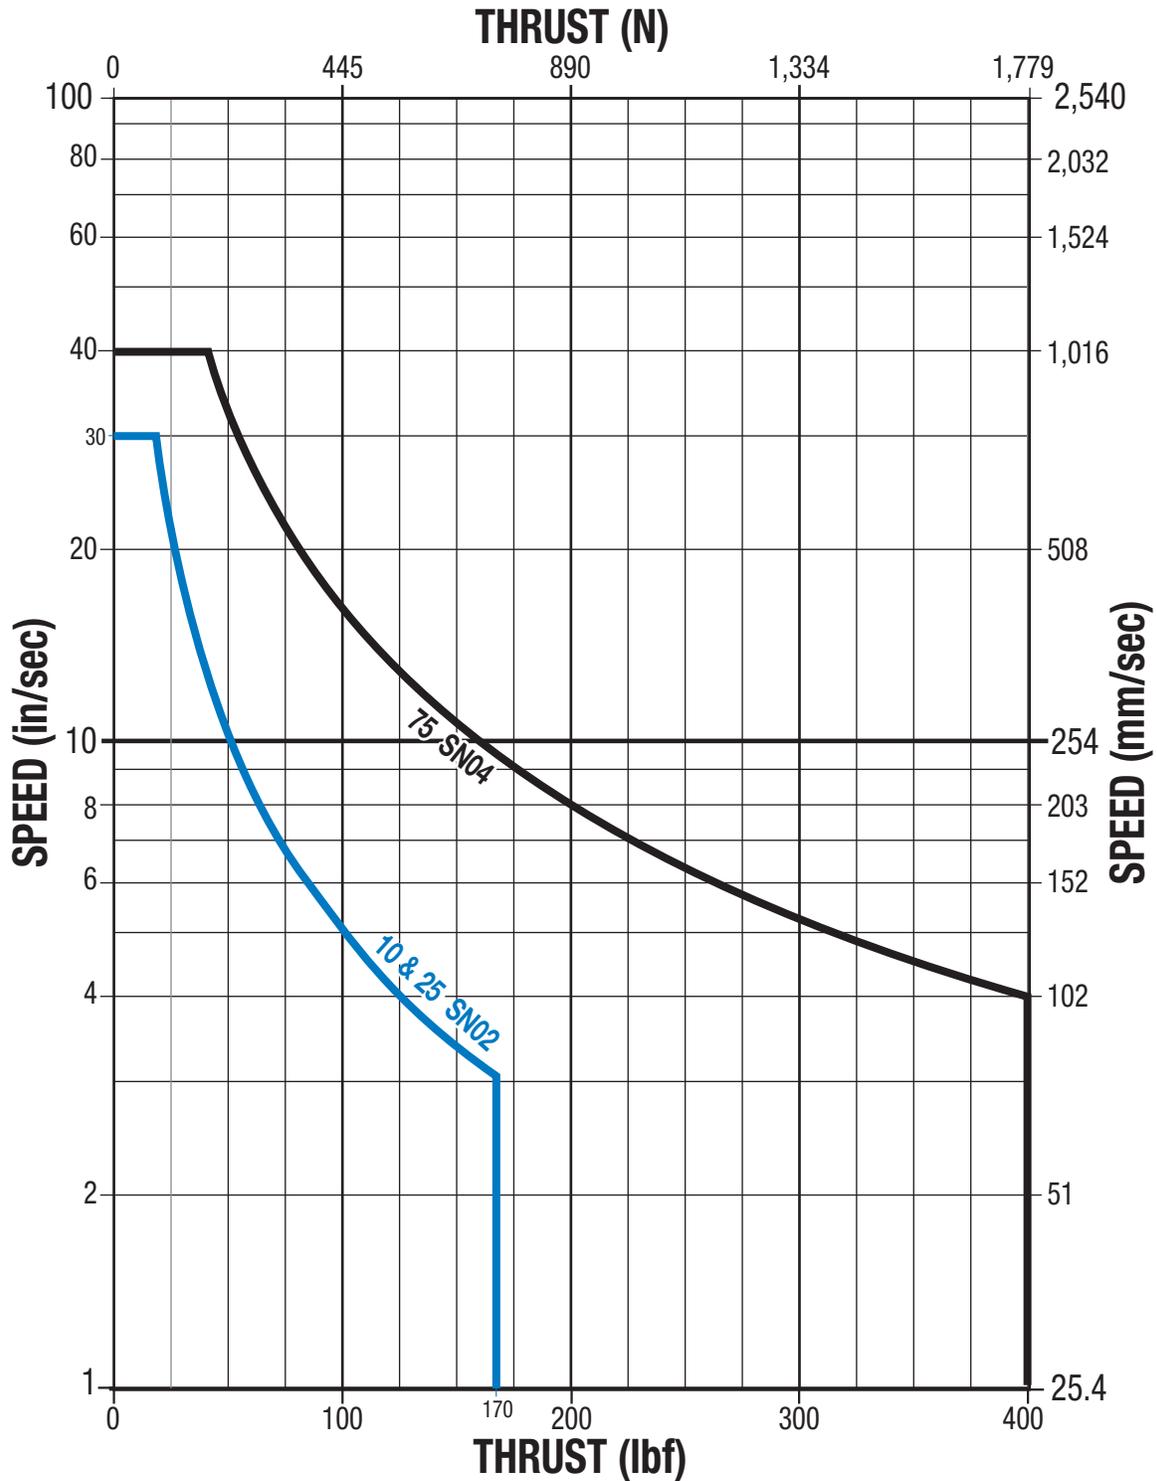

⚠ * Maximum thrust is the maximum continuous dynamic thrust subject to Thrust x Velocity Limitation.


PV LIMITS: Any material which carries a sliding load is limited by heat buildup. The factors that affect heat generation rate in an application are the pressure on the nut in pounds per square inch and the surface velocity in feet per minute. The product of these factors provides a measure of the severity of an application.

$$\frac{P}{(\text{Max. Thrust Rating})} \times \frac{V}{(\text{Max. Speed Rating})} \leq 0.1$$

TKS Rodless Screw Drive Actuator

BALL SCREW/NUT COMBINATIONS

BALL SCREW CRITICAL SPEED CAPACITIES

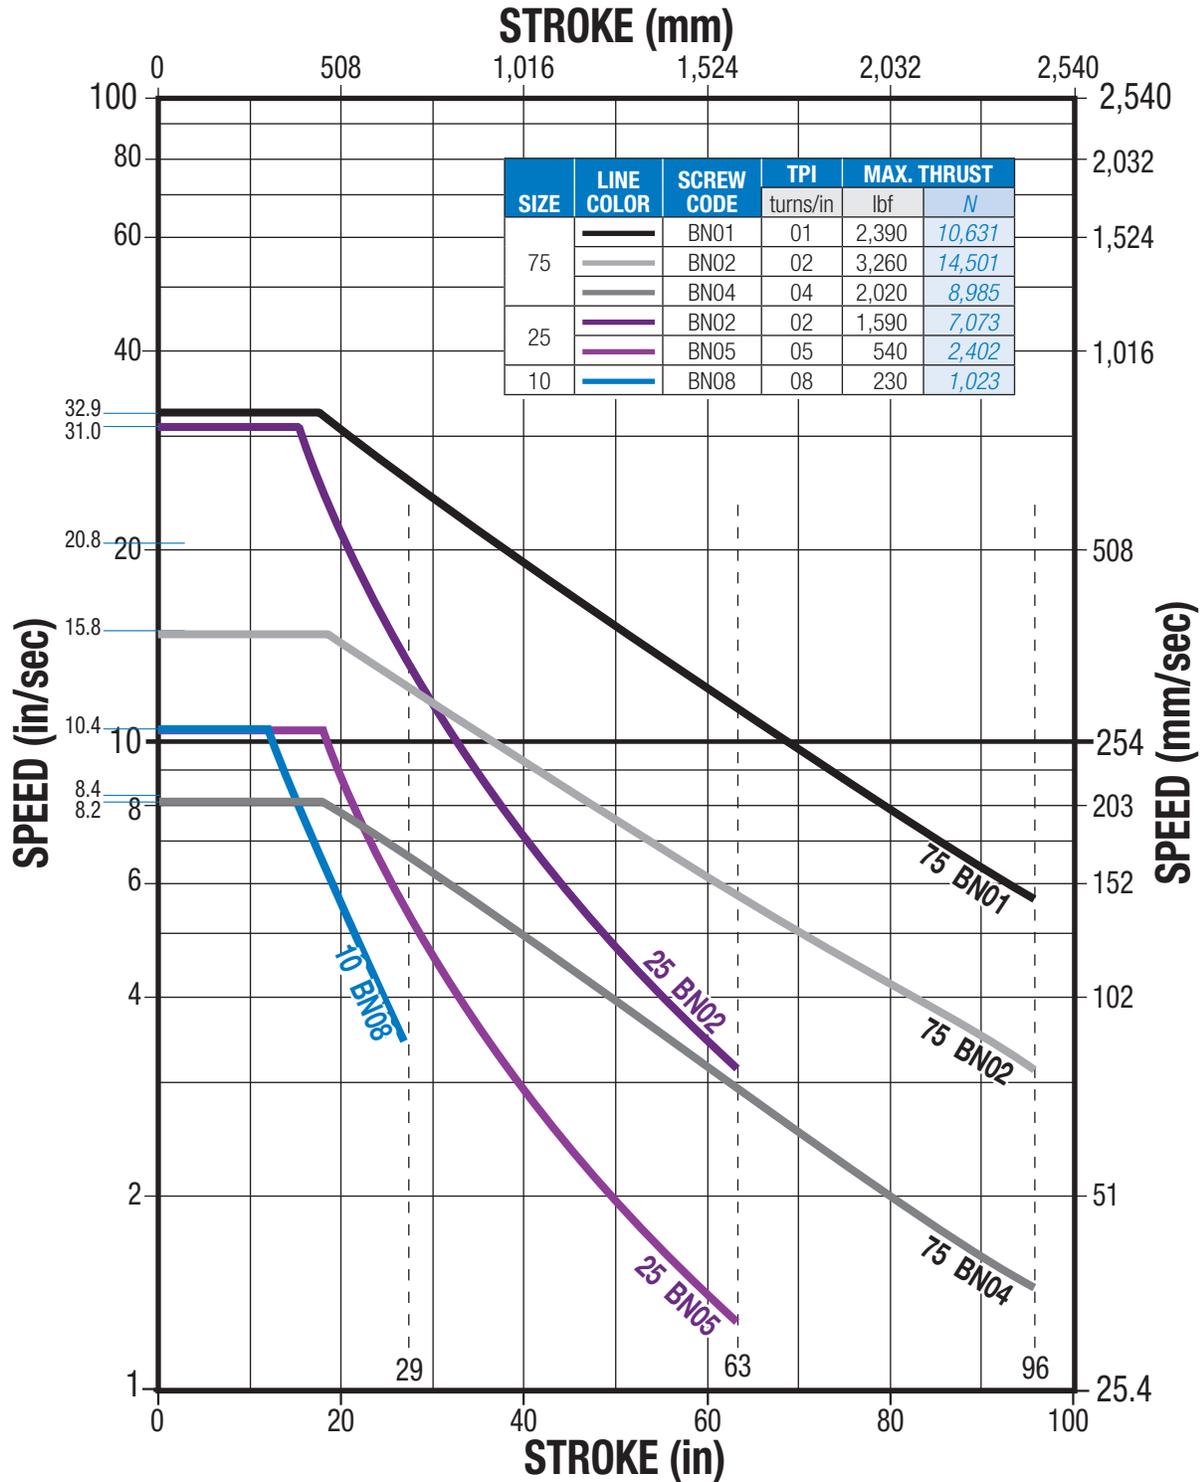

* For ball screws, maximum thrust reflects 90% reliability for 1 million linear inches of travel.

Dashed lines represent maximum stroke for screw selections.

SCREW TYPE BN
DESCRIPTION Ball Nut


TKS

TKB

TKS Rodless Screw Drive Actuator

BALL SCREW SPECIFICATIONS

BALL SCREW LIFE CALCULATION

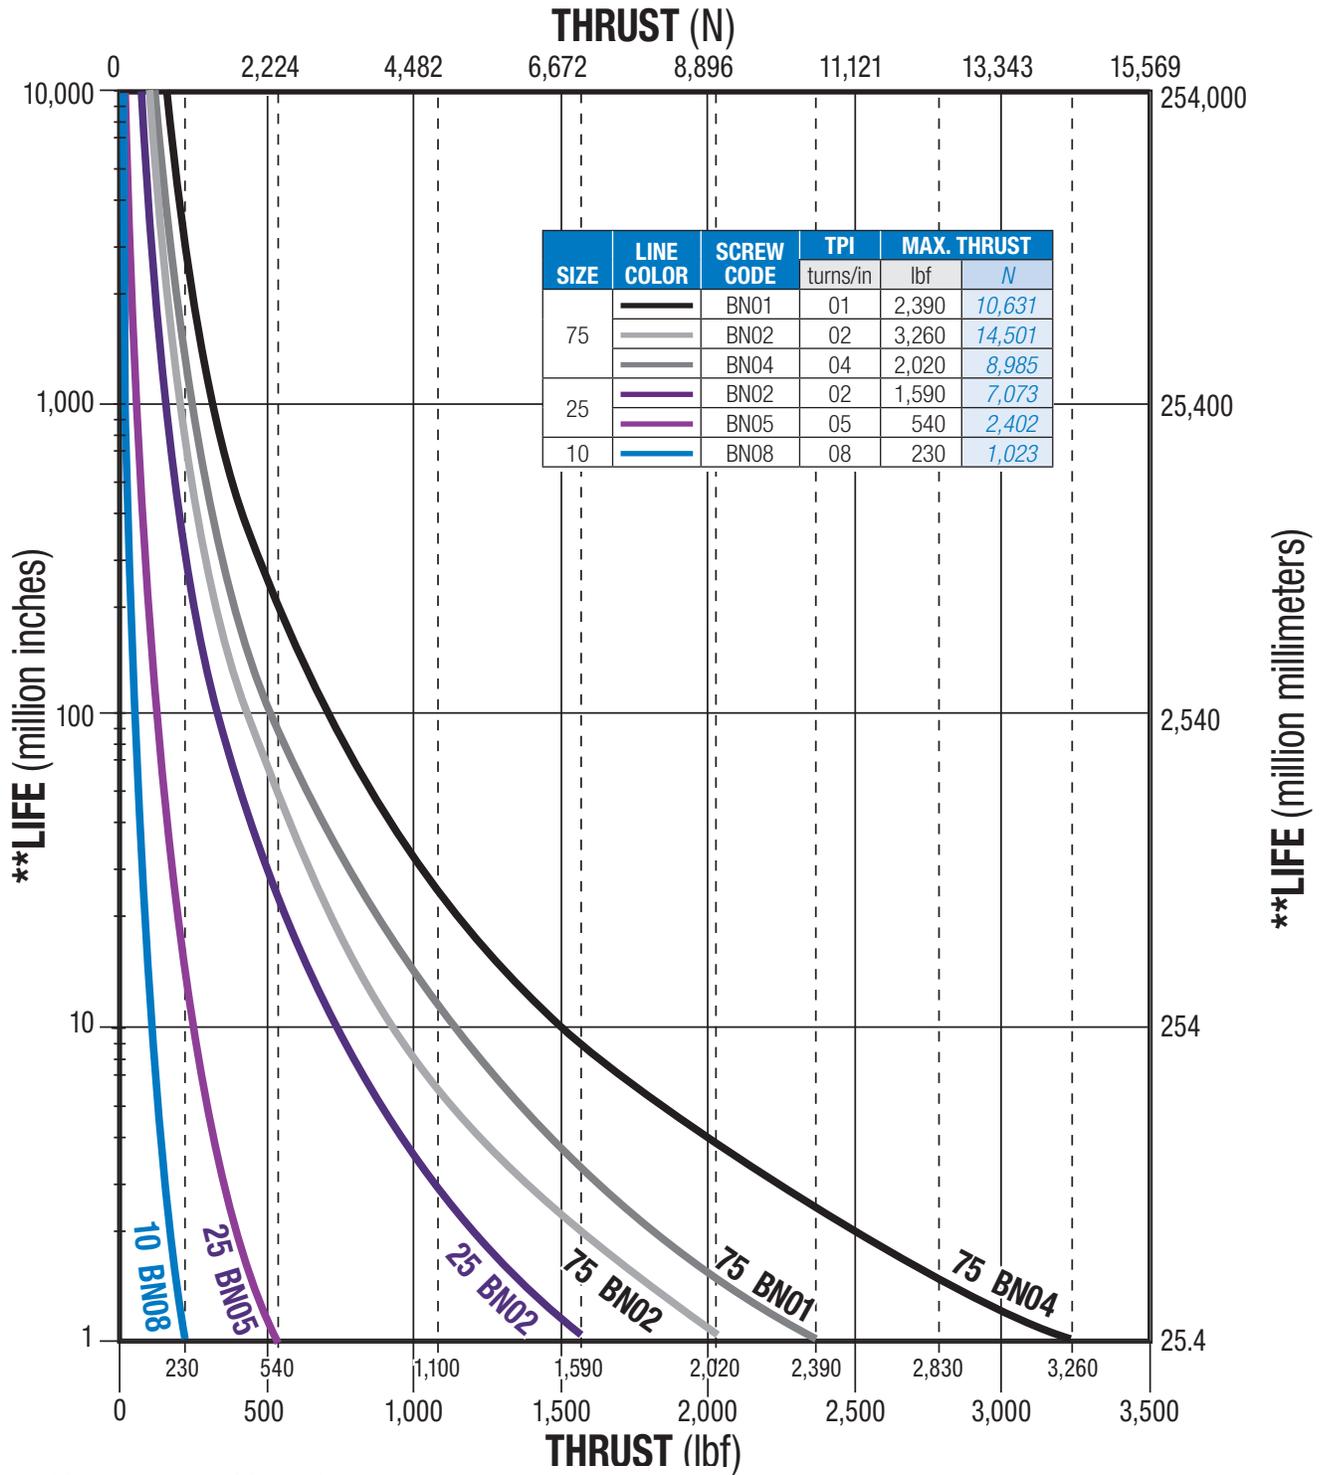

SCREW TYPE DESCRIPTION
BN Ball Nut

▲ * Maximum thrust reflects 90% reliability for 1 million linear inches of travel

**Life indicates theoretical maximum life of screw only, under ideal conditions and does not indicate expected life of actuator.

TKS Rodless Screw Drive Actuator

TKS SPECIFICATIONS

SPECIFICATIONS RELATED TO ACTUATOR SIZE AND SCREW SELECTION

TKS LEAD SCREWS U.S. CONVENTIONAL											
ACTUATOR	SCREW DIA.	SCREW CODE	TPI (turns/in)	LEAD ACCURACY	BACKLASH (in)	MAXIMUM THRUST* (lb)	MAXIMUM STROKE (in)	INERTIA (lb-in ²)			BREAKAWAY TORQUE (lb-in)
	(in)			(in/ft)				BASE ACTUATOR		PER/in OF STROKE	
								In Line	Rev. Parallel		
TKS10	0.500	SN	2	0.003	0.007	170	96	0.0126	0.0159	0.0017	0.938
	0.375	BN	8	0.004	0.002	230	29	0.0029	0.0038	0.0005	0.813
TKS25	0.500	SN	2	0.003	0.007	170	96	0.0263	0.0291	0.0017	1.750
	0.500	BN	2	0.004	0.002	1,590	63	0.0263	0.0291	0.0017	1.438
	0.625	BN	5	0.004	0.002	540	63	0.0311	0.0380	0.0042	1.063
TKS75	1.000	SN	4	0.003	0.007	400	96	0.2196	0.2737	0.0275	2.813
	1.000	BN	1	0.004	0.002	2,390	96	0.3037	0.3578	0.0275	3.438
	1.000	BN	2	0.004	0.002	3,260	96	0.2364	0.2905	0.0275	2.813
	1.000	BN	4	0.004	0.002	2,020	96	0.2196	0.2737	0.0275	2.500

TKS LEAD SCREWS METRIC											
ACTUATOR	SCREW DIA.	SCREW CODE	TPI (turns/in)	LEAD ACCURACY	BACKLASH (mm)	MAXIMUM THRUST* (N)	MAXIMUM STROKE (mm)	INERTIA (kg-m ² x 10 ⁻⁶)			BREAKAWAY TORQUE (N-m)
	(in)			(mm/300)				BASE ACTUATOR		PER/in OF STROKE	
								In Line	Rev. Parallel		
TKS10	0.500	SN	2	0.0762	0.1778	756	2,438	3.69	4.65	0.50	0.11
	0.375	BN	8	0.1016	0.0508	1,023	737	0.85	1.11	0.15	0.09
TKS25	0.500	SN	2	0.0762	0.1778	756	2,438	7.69	8.51	0.49	0.20
	0.500	BN	2	0.1016	0.0508	7,073	1,600	7.69	8.51	0.49	0.16
	0.625	BN	5	0.1016	0.0508	2,402	1,600	9.10	11.12	2.17	0.12
TKS75	1.000	SN	4	0.0762	0.1778	1,779	2,438	64.23	80.06	8.04	0.31
	1.000	BN	1	0.1016	0.0508	10,631	2,438	88.83	104.66	8.04	0.39
	1.000	BN	2	0.1016	0.0508	14,234	2,438	69.15	84.97	8.04	0.31
	1.000	BN	4	0.1016	0.0508	8,985	2,438	64.23	80.06	8.04	0.28

 **Contact the factory for higher accuracy and lower backlash options.**

SCREW TYPE DESCRIPTION

*For Acme screws, maximum thrust is the maximum continuous dynamic thrust subject to Thrust x Velocity limitation. For ball screws, maximum thrust reflects 90% reliability for 1 million linear inches of travel.

SN Solid Nut
BN Ball Nut

TKS Rodless Screw Drive Actuator

TKS SPECIFICATIONS

ACTUATOR SPECIFICATIONS

SPECIFICATIONS	U.S. CONVENTIONAL			METRIC				
		TKS10	TKS25	TKS75		TKS10	TKS25	TKS75
Carrier weight	lb	0.56	2.31	3.54	kg	0.25	1.05	1.61
Base weight (in-line model, including carrier • motor not included)	lb	3.22	9.46	17.95	kg	1.46	4.29	8.14
Weight per/in (mm) of stroke	lb	0.229	0.527	0.932	kg	0.10	0.24	0.42
Straightness (YX Plane) (unconstrained ¹)	in/in	0.0004			mm/mm	0.0004		
Straightness (YX Plane) (constrained ²)	in/in	0.0002			mm/mm	0.0002		
Flatness (ZX Plane) (unconstrained ¹)	in/in	0.0008			mm/mm	0.0008		
Flatness (ZX Plane) (constrained ²)	in/in	0.0002			mm/mm	0.0002		
Screw uni-directional repeatability ³	in	±0.0004			mm	±0.010		
Temperature Range ⁴	°F	40-130			°C	4-54		



¹ Listed values are intended for reference purposes only, and not as an engineering standard of absolute tolerance for a given actuator. Values were derived from testing of characteristic samples of appropriate products, and indicate an expected range of deviation from a theoretical straight line in the indicated plane of carrier motion. Appropriate installation is the single most important factor in reducing such deviation, so good engineering practices such as measurement, mapping, etc. must be employed in applications with stringent straightness/flatness requirements. For more information on how these values were obtained, please read the white paper on this subject available at www.tolomatic.com.

² Actuator mounted on a flat surface and fully restrained.


³ Ball screw; not including backlash

⁴ Heat generated by the motor and drive should be taken into consideration as well as linear velocity and work cycle time. For applications that require operation outside of the recommended temperature range, contact the factory.

LARGE FRAME MOTORS AND SMALLER SIZE ACTUATORS: Cantilevered motors need to be supported, if subjected to continuous rapid reversing duty and/or under dynamic conditions.

TKS Rodless Screw Drive Actuator

DIMENSIONS

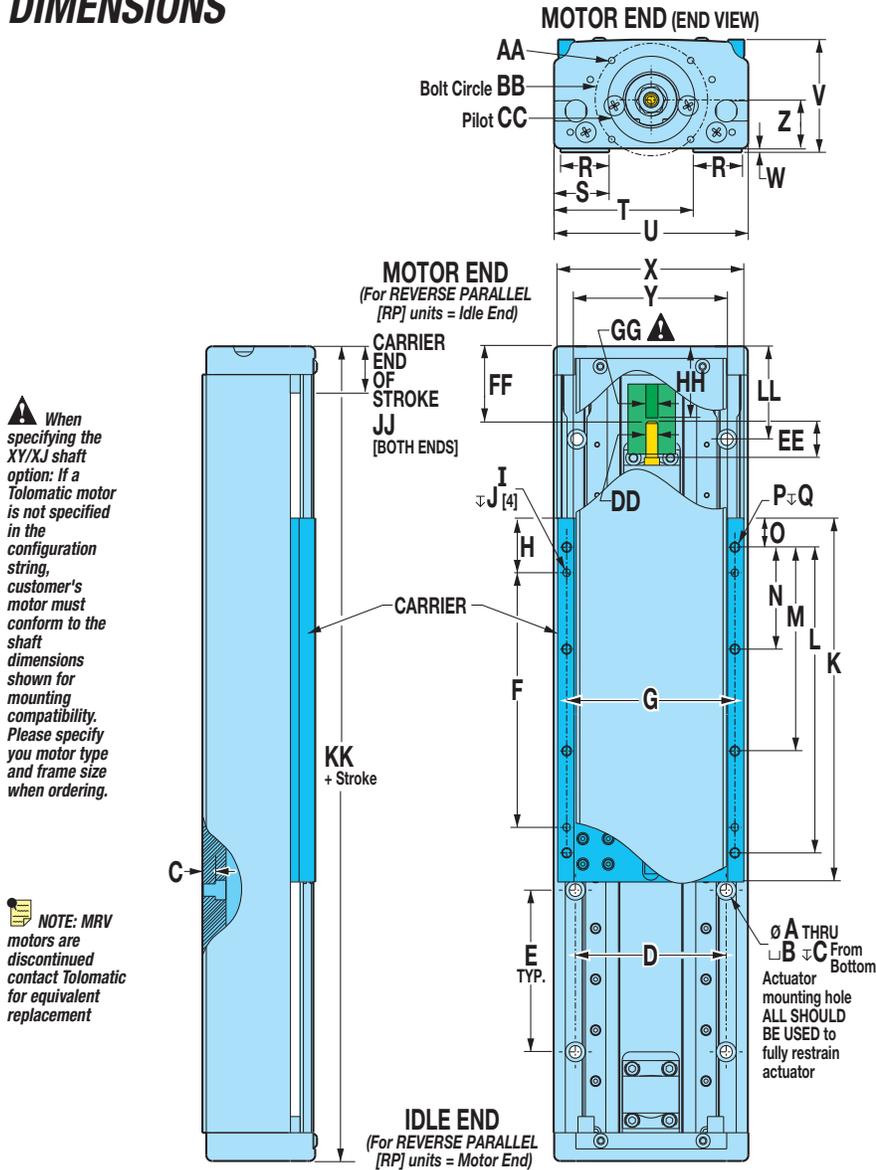

SIZE	10	25	75
A	0.19	0.26	0.34
mm	4.8	6.6	8.6
B	0.31	0.53	0.53
mm	7.9	13.5	13.5
C	0.24	0.31	0.28
mm	6.1	7.9	7.1
D	2.330	3.580	2.939
mm	59.18	90.93	74.65
E	2.500	2.500	5.000
mm	63.50	63.50	127.00
F	3.937	3.937	5.512
mm	100.00	100.00	140.00
G	2.599	3.937	5.315
mm	66.00	100.00	135.00
H	0.84	1.49	1.12
mm	21.4	38.0	28.4
I	0.12	0.24	0.24
mm	3.0	6.0	6.0
J	Thru	Thru	Thru
mm			
K	5.63	6.93	7.75
mm	142.9	175.9	196.9
L	4.725	5.512	7.244
mm	120.02	140.00	184.00
M	3.150	3.543	4.882
mm	80.00	90.00	124.00
N	1.575	1.968	2.362
mm	40.00	50.00	60.00
O	0.45	0.71	0.25
mm	11.4	18.0	6.4
P	M4	M6	M8
mm			
Q	0.31	Thru	Thru
mm	7.9		
R	0.75	1.00	1.75
mm	19.1	25.4	44.5
S	0.85	1.22	2.00
mm	21.6	31.0	50.8
T	2.15	3.28	4.13
mm	54.6	83.3	104.9
U	3.00	4.50	6.13
mm	76.2	114.3	155.6
V	1.74	2.72	3.42
mm	44.2	69.1	86.9
W	0.06	0.06	0.06
mm	1.5	1.5	1.5
X	2.88	4.35	5.97
mm	73.0	110.6	151.7
Y	2.38	3.35	4.72
mm	60.3	85.2	119.9
Z	0.75	1.25	1.62
mm	19.1	31.6	41.2

SIZE	10				25				75	
	Frame 17	23		23		34		34		
	MRS	Brushless	MRS	Brushless	Gearbox	Motor	Gearbox	Motor	Gearbox	
AA	#6-32	M5	M5	M5	M5	M5	M5	M5	M5	
mm										
BB Ø	1.810	2.625	2.625	2.625	2.625	2.625	3.875	3.875	3.875	
mm	45.97	66.68	66.68	66.68	66.68	66.68	98.43	98.43	98.43	
CC Ø	1.182	1.501	1.501	1.501	1.501	1.501	2.875	2.875	2.875	
mm	30.02	38.13	38.13	38.13	38.13	38.13	73.03	73.03	73.03	
DD		0.188				0.315			0.500	
mm		4.78				8.00			12.70	
EE	0.70	0.78	0.58	1.38	0.75	1.00	1.31	1.06	0.71	
mm	17.6	19.7	14.6	35.1	19.1	25.4	33.3	26.9	18.0	
FF	1.16	1.15	1.35	1.49	1.92	1.67	1.36	1.61	1.92	
mm	29.5	29.1	34.2	37.8	48.8	42.4	34.5	40.9	48.8	
GG	0.315	0.250	0.500	0.250	0.500	0.500	0.500	0.500	0.500	
mm	8.00	6.35	12.70	6.35	12.70	12.70	12.70	12.70	12.70	
HH	1.00	0.79	1.50	0.83	1.42	1.18	1.17	1.43	1.21	
mm	25.4	20.0	38.1	21.0	36.0	30.0	29.6	36.3	30.7	
JJ	0.69	motor = 0.75 idle = 0.69				1.00			1.12	
mm	17.5	19.1 17.5				25.4			28.4	
KK	7.00	7.06				8.92			10.31	
mm	177.8	179.4				226.6			261.9	
LL	1.44	1.50				1.63			1.67	
mm	36.5	38.1				41.3			42.4	


TKS
TKB

TKS Rodless Screw Drive Actuator


DIMENSIONS

TKS: DOUBLE C-FACE BRAKE OPTION

BRAKE FOR 23-FRAME MOTOR

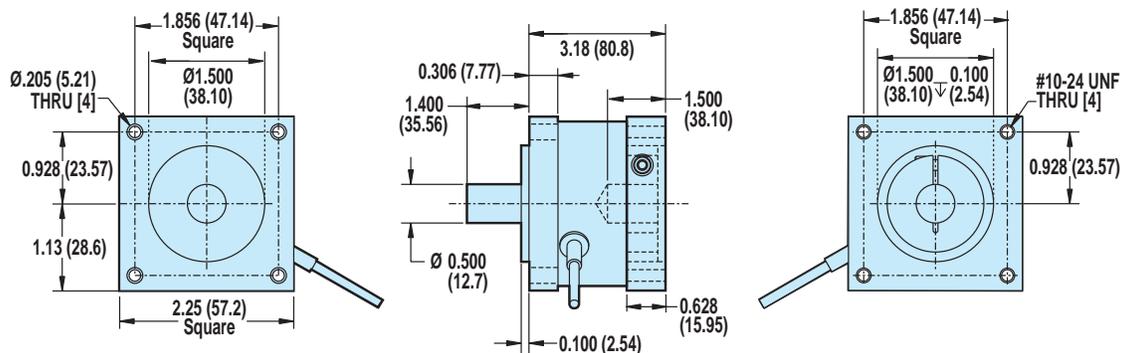

BRAKE FOR 34-FRAME MOTOR

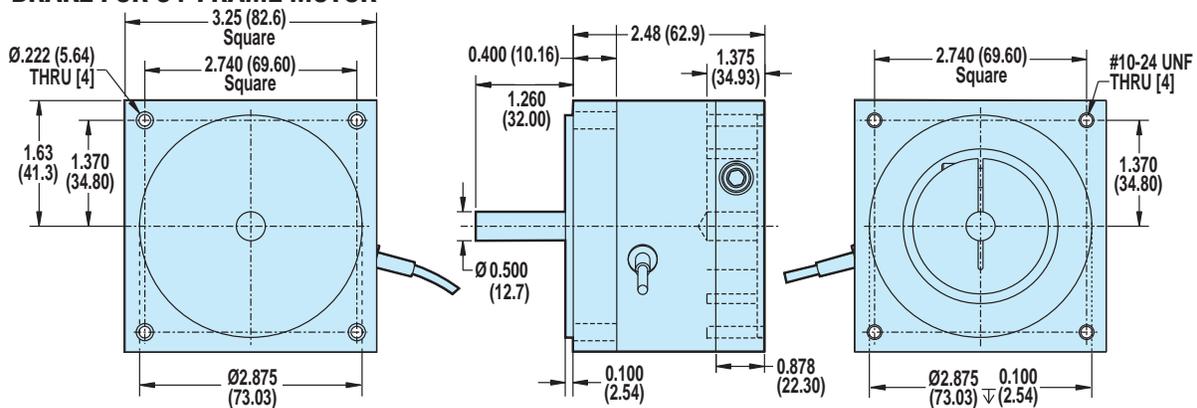

MOTOR TYPE	FRAME	BRAKE PART NO.	STATIC TORQUE		REFLECTED INERTIA		WEIGHT		VOLTAGE	CURRENT	RESISTANCE	CABLE LENGTH	
			lb-in	N-m	lb-in ²	kg-m ² x 10 ⁻⁶	lbs	kg				in	mm
BRUSHLESS	23	3600-6286	10	1.130	0.0125	3.66	1.49	0.68	24	0.286	83.6	16.75	425
	34	3600-6288	25	2.825	0.1087	31.79	2.88	1.31	24	0.369	65.1	18.0	457

MAXIMUM BRAKE HOLDING LOADS

LEADSCREW/NUT REDUCTION	23-FRAME BRAKE						34-FRAME BRAKE					
	INLINE		5:1 GEARBOX		10:1 GEARBOX		INLINE		5:1 GEARBOX		10:1 GEARBOX	
	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg
TKS10 with SN02	180	81.6	180	81.6	180	81.6						
TKS10 with BN08	559	253.5	1874	850	1874	850						
TKS25 with SN02	180	81.6	180	81.6	180	81.6	180	81.6	180	81.6	180	81.6
TKS25 with BN02	140	63.5	903	409.5	1643	745.2	349	158.3	2259	1024.6	4107	1862.8
TKS25 with BN05	349	158.3	2259	1024.6	4008	1817.9	873	395.9	4008	1817.9	4008	1817.9
TKS75 with SN04							419	190	419	190	419	190
TKS75 with BN01							175	79.3	1129	512.1	2053	931.2
TKS75 with BN02							349	158.3	2259	1024.6	4107	1862.8
TKS75 with BN04							698	316.6	4517	2048.8	8213	3725.3

 Double C-face brakes are used for static holding (back driving prevention) and are not designed for dynamic stopping. Please contact Tolomatic if your application requires dynamic stopping. This brake can be used with other Tolomatic systems. Consult Tolomatic for availability.


 NOTE: MRB & MRV motors are discontinued contact Tolomatic for information

TKS Rodless Screw Drive Actuator

DIMENSIONS


NOTE: MRB & MRV motors are discontinued contact Tolomatic for information

TKS10: IN-LINE MOUNT FOR 17-FRAME BRUSHLESS MOTORS

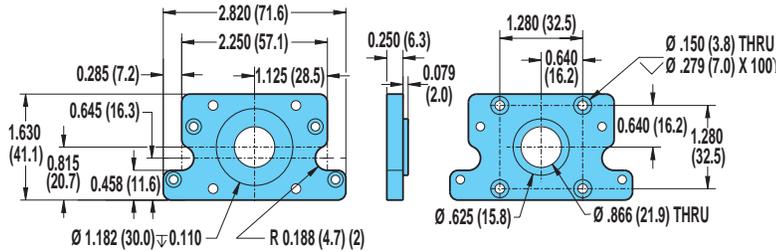


17-frame motors cannot be mounted directly to the actuator head and require the use of the motor adapter plate shown. Gearbox option is not available with 17-frame motors.

TKS10: IN-LINE MOUNT FOR 23-FRAME BRUSHLESS MOTORS OR GEARBOX

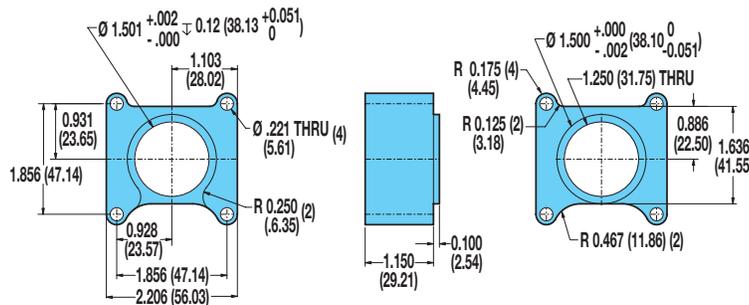

23-frame motors cannot be mounted directly to the actuator head and requires the use of the motor adapter plate shown.

TKS25: IN-LINE MOUNT FOR 34-FRAME BRUSHLESS MOTORS OR GEARBOX

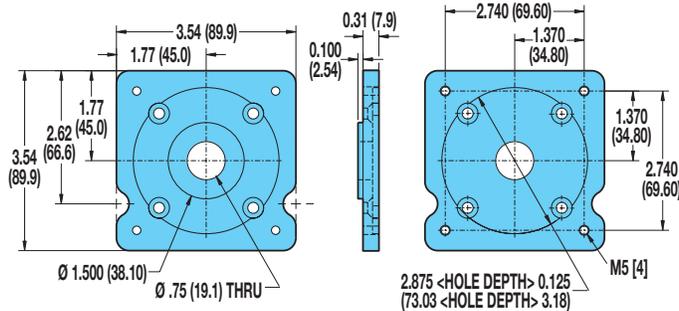

23-frame motors are mounted directly to the actuator head and require no motor adapter plates. 34-frame motors cannot be mounted directly to the actuator head and require the use of the motor adapter plate shown.

TKS75: IN-LINE MOUNT FOR 34-FRAME MOTORS OR GEARBOX


All brushless servo and gearheads may be mounted directly to the actuator head and do not require the use of motor adapter plates.

INTERCHANGING MOTORS: Leadscrews on TruTrack actuators are specific to the motor type specified. Motor mounting plates do not provide for interchanging servo or stepper motors. For gearhead dimensions and specifications, refer to literature #3600-4161

TKS Rodless Screw Drive Actuator

DIMENSIONS

TKS: REVERSE PARALLEL MOUNTING

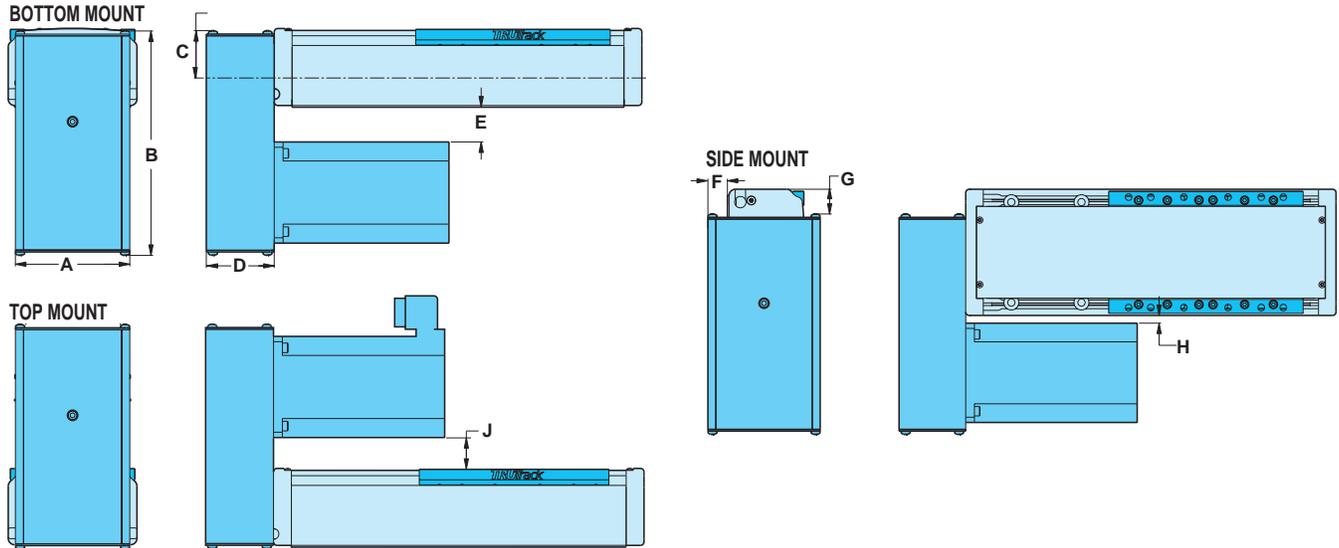

DIMENSIONS

		A		B		C		D		E		F		G		H		J		
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	
BRUSHLESS	TKS10	11, 21, 22, 23, 24 Frame Motor	3.25	82.6	5.70	144.8	1.27	32.3	2.13	54.1	0.98	24.9	0.82	20.8	0.38	9.7	0.29	7.4	0.86	21.8
											23 Frame									
	TKS25	21, 22, 23, 24 Frame	3.25	82.6	7.02	178.4	1.33	33.8	2.13	54.1	1.74	44.2	0.32	8.1	1.07	27.2	0.8	20.3	1.78	45.2
											TKS75	31, 32, 33 Frame								
TKS75	31, 32, 33 Frame Motor	4.00	101.6	8.98	228.1	1.77	45.0	4.00	101.6	1.35			34.3	0.32	8.1	1.45	36.8	0.08	2.0	1.29
										34 Frame										

SPECIFICATIONS

		WEIGHT OF REDUCTION DRIVE				REDUCTION INERTIA AT MOTOR SHAFT				
		1:1		2:1		1:1		2:1		
		lbs	kg	lbs	kg	lb-in ²	kg-cm ²	lb-in ²	kg-cm ²	
BRUSHLESS	TKS10	11, 21, 22, 23, 24 Frame Motor	1.80	0.82	1.80	0.82	0.039	0.1141	0.047	0.1368
			TKS25	2.51	1.14	2.74	1.24	0.038	0.1112	0.103
	TKS25	31, 32, 33 Frame Motor	2.75	1.25	2.98	1.35	0.038	0.1112	0.103	0.3014
	TKS75	31, 32, 33 Frame Motor	3.40	1.54	3.56	1.62	0.036	0.1054	0.227	0.6628

REDUCTION EFFICIENCY: 0.95

TKS


TKB

TKB Rodless Belt Drive Actuator


BELT PERFORMANCE

BELT FORCE AND SPEED CAPACITIES


BELT FORCE FOR TKB ACTUATORS

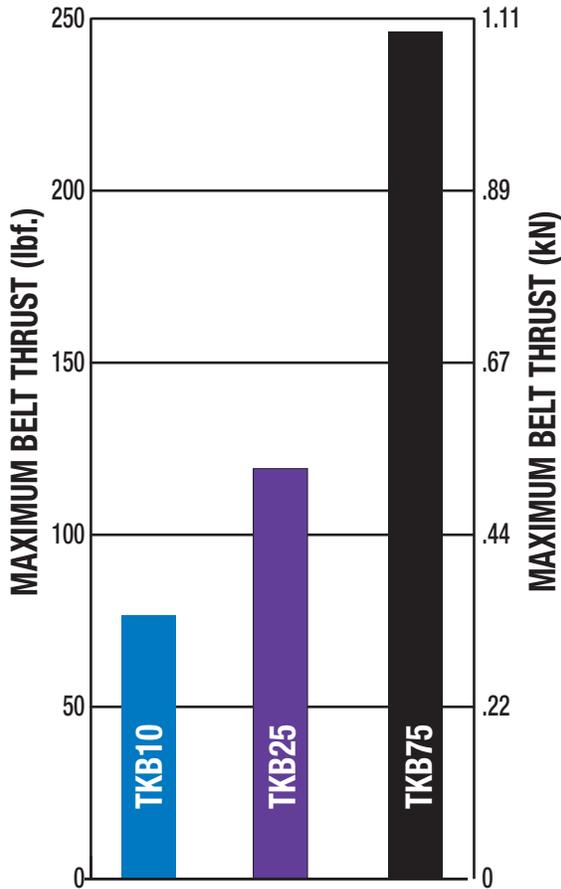

MAXIMUM BELT SPEED FOR TKB ACTUATORS

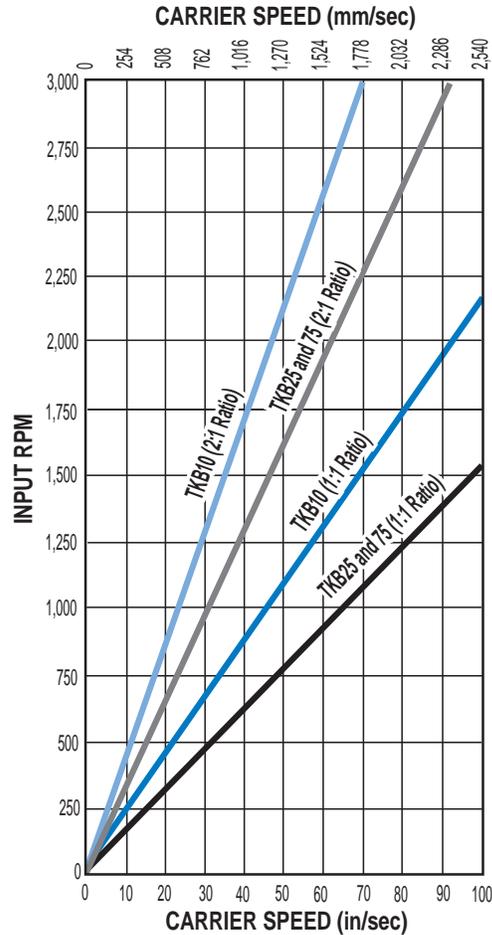


BELT SPECIFICATIONS

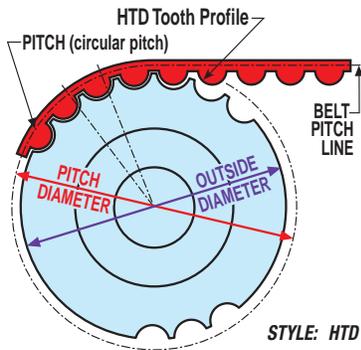

- STYLE: HTD Tooth
 TOOTH PITCH: 5mm
 BELT MATERIAL: Polyurethane body with steel tension members
- CHARACTERISTICS:
- For higher speed, higher load applications
 - Heavy duty drive and idler pulley bearings

MAX ACCELERATION

AS A FUNCTION OF CARRIER LOAD WEIGHT

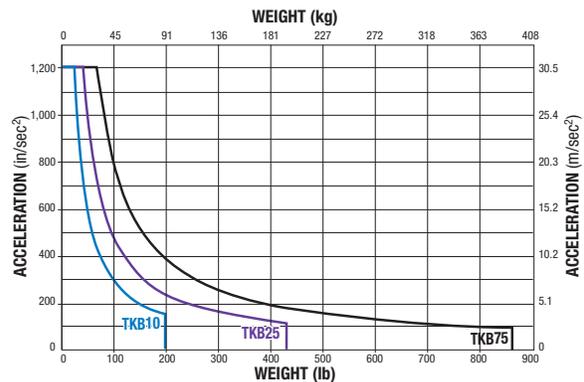

TKB Rodless Belt Drive Actuator

TKB SPECIFICATIONS

TKB BELT, INERTIA AND BREAKAWAY TORQUE SPECIFICATIONS

TKB ACTUATORS (US STANDARD MEASUREMENTS)								
	MAXIMUM STROKE	BELT WIDTH	BELT DEAD LENGTH	WHEEL PITCH DIA.	MOTION RATIO	STRAIGHTNESS & FLATNESS (in) ¹	TEMP. RANGE ²	BREAKAWAY TORQUE
	(in)	(in)	(in)	(in)	(in/rev)	(Constrained)	(F°)	(lb-in)
TKB10	96	0.59	15.88	0.89	2.787	0.0002	40 - 130	3.5
TKB25	96	1.00	23.12	1.19	3.742	0.0002	40 - 130	10.0
TKB75	96	1.97	25.68	1.19	3.742	0.0002	40 - 130	10.0

TKB ACTUATORS (METRIC MEASUREMENTS)								
	MAXIMUM STROKE	BELT WIDTH	BELT DEAD LENGTH	WHEEL PITCH DIA.	MOTION RATIO	STRAIGHTNESS & FLATNESS (mm) ¹	TEMP. RANGE ²	BREAKAWAY TORQUE
	(mm)	(mm)	(mm)	(mm)	(mm/rev)	(Constrained)	(C°)	(N-m)
TKB10	2438	15.0	333.6	22.5	70.78	0.005	4 - 54	0.35
TKB25	2438	25.4	533.8	30.3	95.05	0.005	4 - 54	1.06
TKB75	2438	50.0	1089.8	30.3	95.05	0.005	4 - 54	1.06

GENERAL ACTUATOR SPECIFICATIONS

TKB ACTUATORS (US STANDARD MEASUREMENTS)						
	CARRIER WEIGHT	BASE WEIGHT (inc. carrier)	WEIGHT PER (in) OF STROKE	INERTIA (lb-in ²) BASE ACTUATOR (inc. carrier assy.)	INERTIA (lb-in ²) PER (in) OF STROKE	REPEATABILITY
	(lbs)	(lbs)	(lbs)			(in)
TKB10	0.64	3.23	0.20	0.165	0.0012	±0.002
TKB25	2.41	10.69	0.46	1.100	0.0046	±0.002
TKB75	4.42	18.34	0.72	2.039	0.0090	±0.002

TKB ACTUATORS (METRIC MEASUREMENTS)						
	CARRIER WEIGHT	BASE WEIGHT (inc. carrier)	WEIGHT PER (in) OF STROKE	INERTIA (kg-cm ²) BASE ACTUATOR (inc. carrier assy.)	INERTIA (kg-cm ²) PER (in) OF STROKE	REPEATABILITY
	(kg)	(kg)	(kg)			(mm)
TKB10	0.3	1.5	0.09	0.48	0.41	±0.05
TKB25	1.1	4.8	0.21	3.22	1.29	±0.05
TKB75	1.5	8.3	0.32	5.97	2.54	±0.05




¹ The listed values relating to straightness/flatness are intended for reference purposes only, and not as an engineering standard of absolute tolerance for a given actuator. Appropriate installation is the single most important factor in reducing such deviation, so good engineering practices such as measurement, mapping, etc. must be employed in applications with stringent straightness/flatness requirements.

LARGE FRAME MOTORS AND SMALLER SIZE ACTUATORS: Cantilevered motors need to be supported, if subjected to continuous rapid reversing duty and/or under dynamic conditions.

² Heat generated by the motor and drive should be taken into consideration as well as linear velocity and work cycle time. For applications that require operation outside of the recommended temperature range, contact the factory.

TKB Rodless Belt Drive Actuator

DIMENSIONS

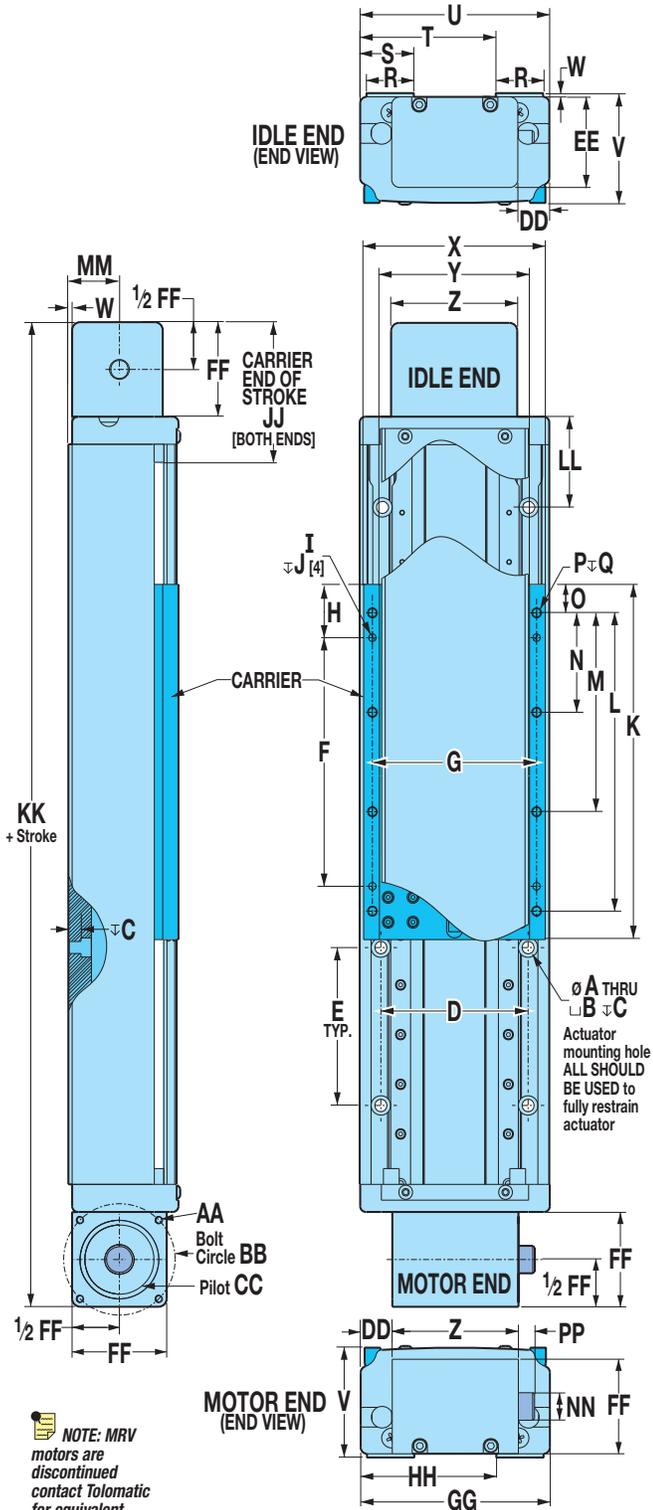

NOTE: MRV motors are discontinued contact Tolomatic for equivalent replacement

SIZE	10	25	75
A Ø	0.19	0.26	0.34
mm	4.8	6.6	8.6
B Ø	0.31	0.53	0.53
mm	7.9	13.5	13.5
C	0.17	0.92	0.34
mm	4.3	23.4	8.6
D	2.330	3.580	2.939
mm	59.18	90.93	74.65
E	2.500	2.500	5.000
mm	63.50	63.50	127.00
F	3.937	3.937	5.512
mm	100.00	100.00	140.00
G	2.599	3.937	5.315
mm	66.00	100.00	135.00
H	0.84	1.49	1.12
mm	21.4	38.0	28.4
I	Ø.12	Ø.24	Ø.24
mm	3.0	6.0	6.0
J	Thru	Thru	Thru
mm			
K	5.63	6.93	7.75
mm	142.9	175.9	196.9
L	4.725	5.512	7.244
mm	120.02	140.00	184.00
M	3.150	3.543	4.882
mm	80.00	90.00	124.00
N	1.575	1.968	2.362
mm	40.00	50.00	60.00
O	0.45	0.71	0.25
mm	11.4	18.0	6.4
P	M4	M6	M8
mm			
Q	0.31	Thru	Thru
mm	7.9		
R	0.75	1.00	1.75
mm	19.1	25.4	44.5
S	0.85	1.22	2.00
mm	21.6	31.0	50.8
T	2.15	3.28	4.13
mm	54.6	83.3	104.9

SIZE	10	25	75
U	3.00	4.50	6.13
mm	76.2	114.3	155.6
V	1.74	2.72	3.42
mm	44.2	69.1	86.9
W	0.06	0.06	0.06
mm	1.5	1.5	1.5
X	2.88	4.35	5.97
mm	73.0	110.6	151.7
Y	2.38	3.35	4.72
mm	60.3	85.2	119.9
Z	2.00	2.88	3.94
mm	50.8	73.0	100.0
AA	M5	M5	M5
mm			
BB	1.768	2.475	2.475
mm	44.90	62.86	62.86
CC	1.251	1.751	1.751
mm	31.78	44.48	44.48
DD	0.50	0.81	1.10
mm	12.7	20.7	27.9
EE	1.44	2.25	2.25
mm	36.5	57.2	57.2
FF	1.50	2.25	2.25
mm	38.1	57.2	57.2
GG	3.00	4.50	6.13
mm	76.2	114.3	155.6
HH	2.15	3.28	4.13
mm	54.6	83.3	104.9
JJ	2.19	3.25	3.37
mm	55.6	82.4	85.6
KK	10.00	13.42	14.81
mm	254.0	340.9	376.1
LL	1.43	1.63	1.75
mm	37.0	41.3	44.5
MM	0.81	1.44	1.86
mm	20.6	36.5	47.2
NN	Ø.436	Ø.500	Ø.500
mm	11.07	12.70	12.70


SIZE	10	25		75
FRAME	23	23		34
MOTOR	MRS	"MRV"	MRS	"MRV"
PP	1.40	0.71	1.46	0.79
mm	35.6	18.1	37.0	20.1
				0.79
				20.1
				20.8

TKB

TKB Rodless Belt Drive Actuator

DIMENSIONS

TKB DIRECT DRIVE MOTOR MOUNTING

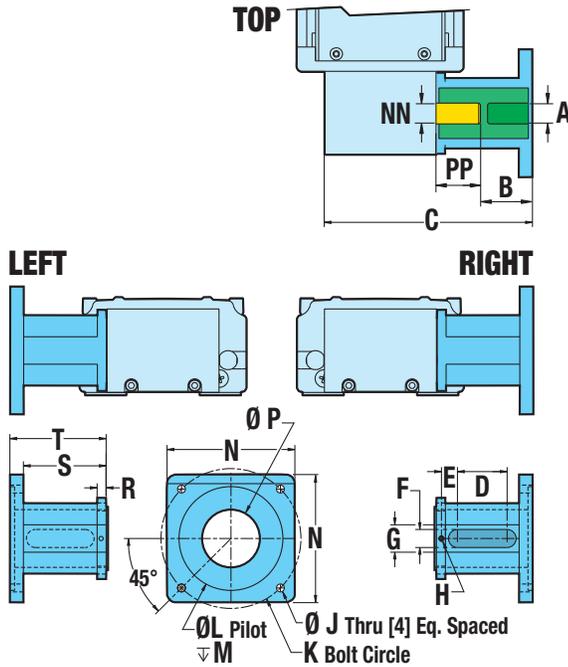


If a Tolomatic motor is not specified in the configuration string, customer's motor must conform to the shaft dimensions shown for mounting compatibility. Please specify your motor type and frame size when ordering.

NOTE: MRB & MRV motors are discontinued contact Tolomatic for information

SIZE	10	25	75	
FRAME	23	23	34	34
A				
mm				
B	1.667	1.936	1.686	1.661
mm	42.34	49.17	42.82	42.19
C	4.63	5.85	5.85	6.19
mm	117.6	1.486	1.486	157.2
D	1.45	1.38	1.60	1.60
mm	36.8	34.9	40.6	40.6
E	0.34	0.47	0.36	0.36
mm	8.6	11.9	9.1	9.1
F	0.38	0.50	0.50	0.50
mm	9.5	12.7	12.7	12.7
G	0.77	0.76	0.76	0.76
mm	19.6	19.3	19.3	19.3
H	Ø M3	Ø M3	Ø M3	Ø M3
J	M5	M5	M5	M5
K	2.625	2.625	3.875	3.875
mm	66.68	66.68	98.43	98.43
L	1.503	1.503	2.877	2.877
mm	38.2	38.2	73.1	73.1
M	0.13	0.13	0.13	0.13
mm	3.3	3.3	3.3	3.3
N	2.25	2.25	3.54	3.54
mm	57.2	57.2	89.9	89.9
P	0.75	1.35	1.60	1.60
mm	19.1	34.3	40.6	40.6
R	0.25	0.25	0.25	0.25
mm	6.4	6.4	6.4	6.4
S	2.26	2.35	2.10	2.10
mm	57.3	59.8	53.4	53.4
T	2.63	2.73	2.48	2.48
mm	66.9	69.3	62.9	62.9
NN	0.375	0.500	0.500	0.500
mm	9.53	12.70	12.70	12.70
PP	0.965	0.793	0.793	0.817
mm	24.51	20.14	20.14	20.75

TKS & TKB: MOUNTING PLATE OPTION

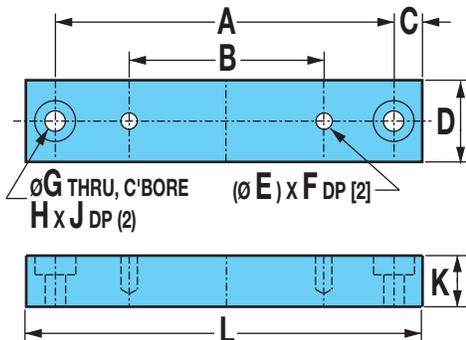

SIZE	10	25	75
A	3.500	5.125	7.000
mm	88.90	130.18	177.80
B	2.330	3.580	2.939
mm	59.10	90.93	74.65
C	0.25	0.31	0.50
mm	6.4	8.0	12.7
D	0.75	1.00	1.00
mm	19.1	25.4	25.4
E	M4x0.7	M6x1.0	M6x1.0
mm			
F	0.31	0.50	0.31
mm	7.8	12.7	7.8


SIZE	10	25	75
G	0.19	0.26	0.34
mm	Ø4.8	Ø6.6	Ø8.6
H	0.31	0.44	0.53
mm	Ø7.8	Ø11.1	Ø13.4
J	0.17	0.28	0.31
mm	4.3	7.1	7.8
K	0.75	0.88	0.63
mm	19.1	22.3	16.0
L	4.00	5.75	8.00
mm	101.6	146.0	203.2

TKB Rodless Belt Drive Actuator


DIMENSIONS

TKB REDUCTION DRIVE MOTOR MOUNTING


TOP LEFT (SDTL)

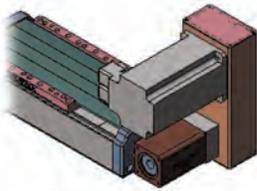






TOP RIGHT (SDTR)

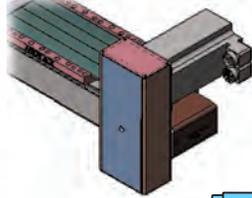

BOTTOM LEFT (SDBL)

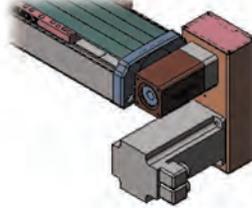

BOTTOM RIGHT (SDBR)

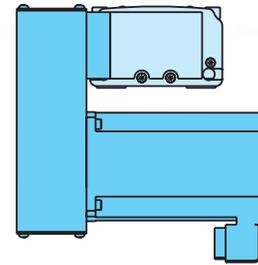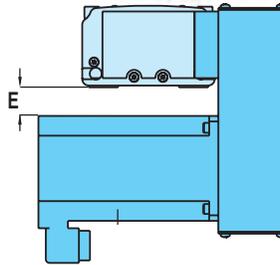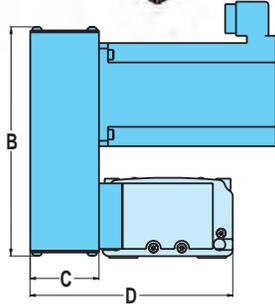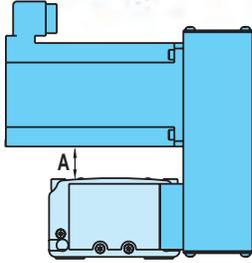

DIMENSIONS

		A		B		C		D		E	
		in	mm	in	mm	in	mm	in	mm	in	mm
10	11 Frame Motor	1.21	30.7	5.70	144.8	2.13	54.1	4.50	114.3	1.33	33.7
	21, 22, 23, 24 Frame Motor	0.86	21.9	5.70	144.8	2.13	54.1	4.50	114.3	0.98	24.9
25	21, 22, 23, 24 Frame Motor	1.77	44.9	7.02	178.3	2.13	54.1	5.67	144.1	1.61	40.8
	31, 32, 33 Frame Motor	1.12	28.5	7.79	197.9	2.38	60.5	5.92	150.4	0.96	24.4
75	31, 32, 33 Frame Motor	1.60	40.7	8.98	228.1	2.38	60.5	7.00	177.9	1.28	32.5

SPECIFICATIONS

		WEIGHT OF REDUCTION DRIVE				REDUCTION INERTIA AT MOTOR SHAFT			
		1:1		2:1		1:1		2:1	
		lbs	kg	lbs	kg	lb-in ²	kg-cm ²	lb-in ²	kg-cm ²
10	11, 21, 22, 23, 24 Frame Motor	1.80	0.82	1.80	0.82	0.039	0.1141	0.047	0.1368
25	21, 22, 23, 24 Frame Motor	2.55	1.16	2.78	1.26	0.036	0.1054	0.227	0.6628
	31, 32, 33 Frame Motor	2.80	1.27	3.03	1.37	0.036	0.1054	0.227	0.6628
75	31, 32, 33 Frame Motor	3.44	1.56	3.60	1.63	0.036	0.1054	0.227	0.6628

REDUCTION EFFICIENCY: 0.95

 NOTE: MRB & MRV motors are discontinued contact Tolomatic for information

TKS

TKB

TKS & TKB Rodless Actuators

SWITCHES



There are 4 sensing choices: DC reed, form A (open) or form C (open or closed); Hall-effect, sourcing, PNP (open); Hall-effect, sinking, NPN (open); each with either flying leads. Commonly used to send analog signals to PLC (programmable logic controllers), TLL, CMOS circuit or other controller device. These switches are activated by the actuator's magnet.

Switches contain reverse polarity protection.

If necessary to remove factory installed switches, be sure to reinstall on the same side of actuator with scored face of switch toward internal magnet.

SPECIFICATIONS

ORDER CODE	REED DC		HALL-EFFECT DC	
	R T	B T	T T	K T
PART NUMBER	3600-9082	3600-9084	3600-9088	3600-9090
LEAD	5M	5M	5M	5M
CABLE SHIELDING	UNSHIELDED	UNSHIELDED	UNSHIELDED	UNSHIELDED
SWITCHING LOGIC	"A" NORMALLY OPEN	"C" NORMALLY OPEN OR CLOSED	PNP (SOURCING) NORMALLY OPEN	NPN (SINKING) NORMALLY OPEN
MECHANICAL CONTACTS	SINGLE-POLE SINGLE-THROW	SINGLE-POLE DOUBLE-THROW	NO, THESE ARE SOLID STATE COMPONENTS	
COIL DIRECT	YES	YES	—	
POWER LED	NONE	NONE	NONE	NONE
SIGNAL LED	RED		RED	RED
OPERATING VOLTAGE	200 VDC MAX.	120 VDC MAX.	5 - 25 VDC	
OUTPUT RATING	—		25 VDC, 200MA DC	
OPERATING TIME	0.6 MSEC MAX. (INCLUDING BOUNCE)	0.7 MSEC MAX. (INCLUDING BOUNCE)	< 10 MICRO SEC.	
OPERATING TEMPERATURE	-40°F [-40°C] TO 158°F [70°C]		0°F [-18°C] TO 150°F [66°C]	
RELEASE TIME	1.0 MSEC. MAX.		—	
ON TRIP POINT	—		150 GAUSS MAXIMUM	
OFF TRIP POINT	—		40 GAUSS MINIMUM	
**POWER RATING (WATTS)	10.0 §	3.0 §§	5.0	
VOLTAGE DROP	2.6 V TYPICAL AT 100 MA	NA	—	
RESISTANCE	0.1 Ω INITIAL (MAX.)		—	
CURRENT CONSUMPTION	—		200 MA AT 25 VDC	
CABLE MIN. BEND RADIUS	STATIC	0.630" [16MM]		
	DYNAMIC	NOT RECOMMENDED		

CAUTION: DO NOT OVER TIGHTEN SWITCH HARDWARE WHEN INSTALLING!

**** WARNING:** Do not exceed power rating (Watt = Voltage X Amperage). Permanent damage to sensor will occur.

§ Maximum current 500mA (not to exceed 10VA) Refer to Temperature vs. Current graph and Voltage Derating graph


§§ Maximum current 250mA (not to exceed 3VA) Refer to Temperature vs. Current graph and Voltage Derating graph

Reed Switch Life Expectancy: Up to 200,000,000 cycles (depending on load current, duty cycle and environmental conditions)


TKS & TKB Rodless Actuators

SWITCH PERFORMANCE

TEMP. vs CURRENT, DC REED

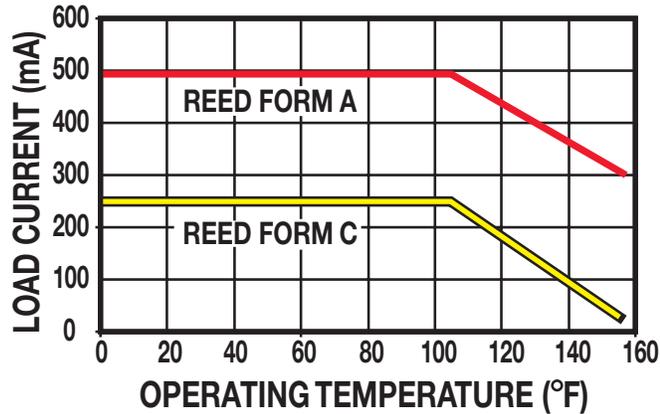


VOLTAGE DERATING, DC REED

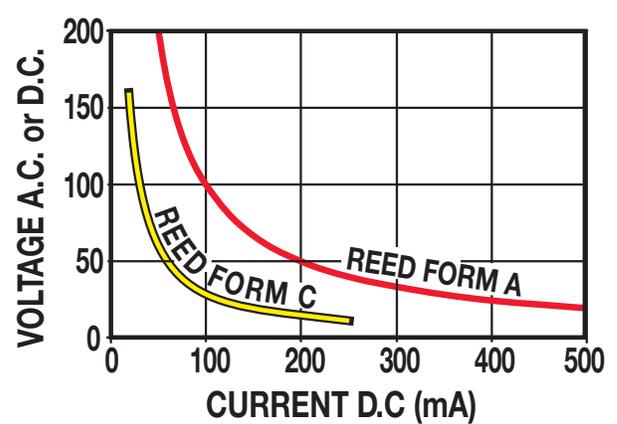


WIRING DIAGRAMS


DC REED, FORM A

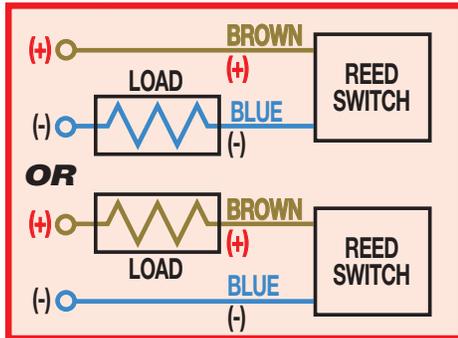


DC REED, FORM C

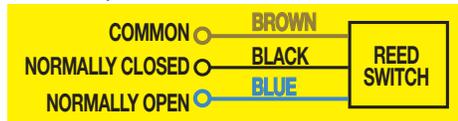

HALL-EFFECT, SOURCING, PNP

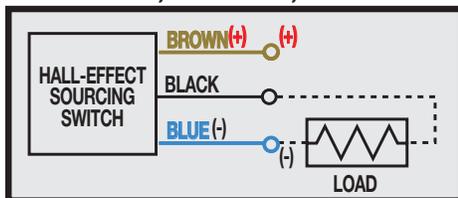

HALL-EFFECT, SINKING, NPN

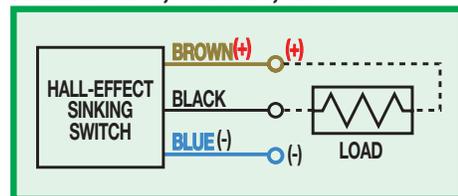

INSTALLATION INFORMATION



⚠ THE NOTCHED FACE OF THE SWITCH INDICATES THE SENSING SURFACE AND MUST FACE TOWARD THE MAGNET.

TKS

TKB

COMPILE APPLICATION REQUIREMENTS

APPLICATION DATA WORKSHEET

Fill in known data. Not all information is required for all applications

ORIENTATION

Horizontal Side Horizontal Down Vertical Angled °

Load attached to carrier OR Load supported by other mechanism

DISTANCE FROM CENTER OF CARRIER TO LOAD CENTER OF GRAVITY

d_x _____
 d_y _____
 d_z _____

inch (U.S. Standard) millimeter (Metric)

STROKE LENGTH

inch (S I) (U.S. Standard) millimeters (Metric)

NOTE: If load or force on carrier changes during cycle use the highest numbers for calculations

LOAD

lb. (U.S. Standard) kg. (Metric)

THRUST REQUIRED

lbf. (U.S. Standard) N (Metric)

F_z _____
 F_y _____

BENDING MOMENTS APPLIED TO CARRIER

in.-lbs. (U.S. Standard) N-m (Metric)


PRECISION

Repeatability _____
 inch millimeters

OPERATING ENVIRONMENT

Temperature, Contamination, etc.

MOTION PROFILE

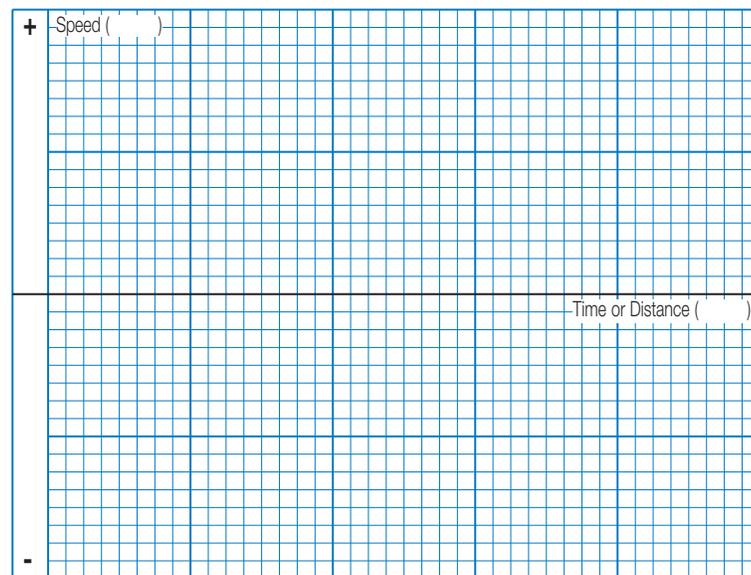

Graph your most demanding cycle, including accel/decel, velocity and dwell times. You may also want to indicate load variations and I/O changes during the cycle. Label axes with proper scale and units.

CONTACT INFORMATION

Name, Phone, Email _____
 Co. Name, Etc. _____



USE THE TOLOMATIC SIZING AND SELECTION SOFTWARE AVAILABLE ON-LINE AT
www.tolomatic.com OR... CALL TOLOMATIC 1-800-328-2174 with the above information. We will provide any assistance needed to determine the proper TK actuator for the job.

FAX 1-763-478-8080

SELECTION GUIDELINES

The process of selecting a load bearing actuator for a given application can be complex. It is highly recommended that you contact Tolomatic or a Tolomatic Distributor for assistance in selecting the best actuator for your application. The following overview of the selection guidelines are for educational purposes only.

1 CHOOSE ACTUATOR SIZE

Choose an actuator that has the thrust, speed and moment load capacity to move the load. Use the Critical Speed graph (page TK_11&12) for the screw and the Moment and Load Capacity table (pg. TK_8) for the actuator.

2 COMPARE LOAD TO MAXIMUM LOAD CAPACITIES

Calculate the application load (combination of load mass and forces applied to the carrier) and application bending moments (sum of all moments Mx, My, and Mz applied to the carrier). Be sure to evaluate the magnitude of dynamic inertia moments. When a rigidly attached load mass is accelerated or decelerated, its inertia induces bending moments on the carrier. Careful attention to how the load is decelerated at the end of the stroke is required for extended actuator performance and application safety. If either load or any of your moments exceed figures indicated in the

Moment and Load Capacity table (pg. TK_10) for the actuator consider:

- 1) Higher capacity bearing style
- 2) A larger actuator size
- 3) Auxiliary carrier
- 4) External guide system

3 CALCULATE LOAD FACTOR LF

For loads with a center of gravity offset from the carrier account for both applied (static) and dynamic loads. The load factor (LF) must not exceed the value of 1.5

$$L_f = \frac{M_x}{M_{x_{max}}} + \frac{M_y}{M_{y_{max}}} + \frac{M_z}{M_{z_{max}}} + \frac{F_y}{F_{y_{max}}} + \frac{F_z}{F_{z_{max}}} \leq 1.5$$

If LF does exceed the value of 1.5, consider the four choices listed in step #2.

4 ESTABLISH YOUR MOTION PROFILE AND CALCULATE ACCELERATION RATE

Using the application stroke length and maximum carrier velocity (or time to complete the linear motion), establish the motion profile. Select either triangular (accel-decel) or trapezoidal (accel-constant speed-decel) profile. Now calculate the maximum acceleration and deceleration rates of the move. Based on the stroke length, speed and acceleration rate, etc. select either a screw-driven (TKS) or belt-driven (TKB). In a TKS screw-driven (TKB). In a TKB belt-driven actuator verify that the belt thrust and acceleration values to not exceed allowable limits (page TK_21).

5 SELECT THE LEAD SCREW

Based on the application requirements for accuracy, backlash, quiet operation, life, etc. select the appropriate lead screw type (Acme screw with a solid nut or ball screw with a standard or anti-backlash nut) and the pitch (lead). For additional information on screw selection, consult "Which Screw? Picking the Right Technology" (#9900-4644) available at www.tolomatic.com.

7 DETERMINE MOUNTING PLATE REQUIREMENTS


- Consult the Support Recommendations graph for the model selected (page TK_10)
- Cross reference the application load and maximum distance between supports
- Select the appropriate number of mounting plates if required for motor and adapter clearance.

8 CONSIDER OPTIONS

- BE2 Bellows for ingress protection
- LU Low dust generating grease
- BRK In-line mounted brake
- Switches - Reed, Solid State PNP or NPN, all available normally open or normally closed

SPEED FACTOR

FOR APPLICATIONS WITH HIGH SPEED OR SIGNIFICANT SHOCK AND VIBRATION: Calculated values of loads and bending moments must be increased by speed factor from the graph below to obtain full rated life of profiled rail bearing system.

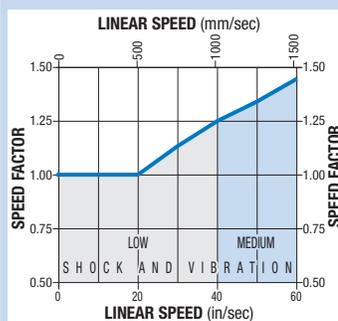

6 SELECT MOTOR (GEARHEAD IF NECESSARY) AND DRIVE

To help select a motor and drive, use the sizing equations located in the Engineering Resources section [ENGR] to calculate the application thrust and torque requirements. Refer to Motor sections & [MRS] to determine the motor and drive.

TKS Rodless Screw Drive Actuator

ORDERING

BASE MODEL SPECIFICATIONS

TKS 75 BN02 SK55 LMB

OPTIONS SPECIFICATIONS

DC18 KT2 BE2 BRK LU MP4

MODEL

TKS TruTrack Screw Drive Actuator

PAYLOAD LIMITS

10	100 lbs	25	250 lbs	75	750 lbs
-----------	---------	-----------	---------	-----------	---------

NUT/SCREW CONFIGURATION

MODELS

SOLID NUT / PITCH (turn/in)	SERIES
SN02	TKS10, 25
SN04	TKS75

BALL NUT / PITCH (turn/in)	SERIES
BN01	TKS75
BN02	TKS25, 75
BN04	TKS75
BN05	TKS25
BN08	TKS10

STROKE LENGTH

SK Stroke, then enter desired stroke length in decimal inches

MODEL		MAX STROKE* (in)
TKS10	Ball Nut	29
	Solid Nut	96
TKS25	Ball Nut	63
	Solid Nut	96
TKS75	Ball/Solid Nut	96

*Actuator cover has maximum stroke of 48 inches

MOTOR MOUNTING / REDUCTIONS

⚠ The length on the leadscrew and coupling device is determined by motor selection. Motor type and frame size must be specified when ordering.

(must choose one)

LMI In-Line mount
LMB In-Line mount with brake
LMG In-Line mount with gearhead
RPL1 1:1 Reverse-Parallel mount left
RPR1 1:1 Reverse-Parallel mount right
RPB1 1:1 Reverse-Parallel mount bottom
RPT1 1:1 Reverse-Parallel mount top
RPL2 2:1 Reverse-Parallel mount left
RPR2 2:1 Reverse-Parallel mount right
RPB2 2:1 Reverse-Parallel mount bottom
RPT2 2:1 Reverse-Parallel mount top

📄 When the LMB option is selected, the configurator picks the appropriate screw and hardware to accommodate the mounting of the brake based on motor selection. The brake option "BRK" must also be indicated in the configuration string.

When the LMG option is selected, the configurator picks the appropriate screw and hardware to accommodate the mounting of the gearhead based on motor selection. A gearhead reduction must also be indicated in the configuration string. Please reference the motor ordering pages for available options.

AUXILIARY CARRIER

DC_ Auxiliary Carrier, then center-to-center spacing desired in decimal inches. (Center-to-Center spacing will add to overall dead length and will not subtract from the stroke length)

SWITCHES

RT_ Reed Switch (Form A) with 5-meter lead, and quantity desired
BT_ Reed Switch (Form C) with 5-meter lead, and quantity desired
KT_ Hall-effect Sinking Switch with 5-meter lead, and quantity desired
TT_ Hall-effect Sourcing Switch with 5-meter lead, and quantity desired
SP*_ Sensor Package

*Includes: Two Form C reed switches w/5-meter leads, mounted 1" from end-of-stroke and one Hall-effect sinking switch w/5-meter lead, mounted 2" from end-of-stroke on motor end.

BELLOWS

BE2 Bellows option (increases the dead length of the actuator, see pg. TK_12)

BRAKE OPTION

BRK In-line mounted brake***
 ***Used with the LMB in-line mounting option.

SPECIAL LUBRICATION

LU Low dust generating grease

MOUNTING PLATES

MP_ Mounting Plates plus quantity desired

⚠ Not all codes listed are compatible with all options.
 Use Tolomatic Sizing Software to determine available options and accessories based on your application requirements.



NOTE: MRV motors are discontinued contact Tolomatic for equivalent replacement

FIELD RETROFIT KITS				
ITEM	TKS10	TKS25	TKS50	TKS75
Mounting Plates	0601-9803	0602-9803	0603-9803	0604-9803

TKB Rodless Belt Drive Actuator

ORDERING

BASE MODEL SPECIFICATIONS

TKB 75 SK48 SDBR2

MODEL
TKB TruTrack Belt Drive Actuator

PAYLOAD LIMITS
10 100 lbs
25 250 lbs 75 750 lbs

STROKE LENGTH
SK Stroke, then enter desired stroke length in decimal inches

MODEL	MAX STROKE* (in)
TKB All Sizes	96

*Actuator cover has maximum stroke of 48 inches

MOTOR MOUNTING / REDUCTIONS
(must choose one)

DIRECT DRIVE
SDL Direct Drive - Left
SDR Direct Drive - Right
▲ A motor size and code must be selected when specifying a 1:1 or 2:1 reduction.

REDUCTION DRIVE
SDTL1 1:1 Reduction Drive / Top Left
SDTR1 1:1 Reduction Drive / Top Right
SDBL1 1:1 Reduction Drive / Bottom Left
SDBR1 1:1 Reduction Drive / Bottom Right
SDTL2 2:1 Reduction Drive / Top Left
SDTR2 2:1 Reduction Drive / Top Right
SDBL2 2:1 Reduction Drive / Bottom Left
SDBR2 2:1 Reduction Drive / Bottom Right

OPTIONS SPECIFICATIONS

DC18 KT2 BE2 LU MP4

AUXILIARY CARRIER
DC_ Auxiliary Carrier, then center-to-center spacing desired in decimal inches. (Center-to-Center spacing will add to overall dead length and will not subtract from the stroke length)

SWITCHES
RT_ Reed Switch (Form A) with 5-meter lead, and quantity desired
BT_ Reed Switch (Form C) with 5-meter lead, and quantity desired
KT_ Hall-effect Sinking Switch with 5-meter lead, and quantity desired
TT_ Hall-effect Sourcing Switch with 5-meter lead, and quantity desired
SP*_ Sensor Package

*Includes: Two Form C reed switches w/5-meter leads, mounted 1" from end-of-stroke and one Hall-effect sinking switch w/5-meter lead, mounted 2" from end-of-stroke on motor end.

BELLOWS
BE2 Bellows option (increases the dead length of the actuator, see pg. tkb_8)

SPECIAL LUBRICATION
LU Low dust generating grease

MOUNTING PLATES
MP_ Mounting Plates plus quantity desired

▲ Not all codes listed are compatible with all options.
Use Tolomatic Sizing Software to determine available options and accessories based on your application requirements.



NOTE: MRV motors are discontinued contact Tolomatic for equivalent replacement

FIELD RETROFIT KITS				
ITEM	TKB10	TKB25	TKB50	TKB75
Mounting Plates	0601-9803	0602-9803	0603-9803	0604-9803

THE TOLOMATIC DIFFERENCE What you expect from the industry leader:




EXCELLENT CUSTOMER SERVICE & TECHNICAL SUPPORT

Our people make the difference! Expect prompt, courteous replies to all of your application and product questions.



INDUSTRY LEADING DELIVERIES

Tolomatic continues to offer the fastest delivery of standard catalog products. Modified and custom products ship weeks ahead of the competition.

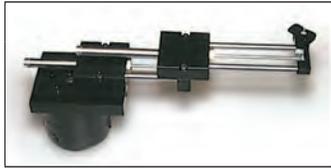

INNOVATIVE PRODUCTS

From standard catalog products... to modified products... to completely unique custom products, Tolomatic designs and builds the best solutions for your challenging applications.



ONLINE SIZING & SELECTION SOFTWARE

Online sizing that is easy to use, accurate and always up-to-date. Input your application data and the software will determine a Tolomatic electric actuator to meet your requirements.



3D MODELS & 2D DRAWINGS AVAILABLE ON THE WEB

Easy to access CAD files are available in many popular formats.

ALSO CONSIDER THESE OTHER TOLOMATIC PRODUCTS:

PNEUMATIC PRODUCTS



RODLESS CYLINDERS: Band Cylinders, Cable Cylinders, MAGNETICALLY COUPLED CYLINDERS/SLIDES; GUIDED ROD CYLINDER SLIDES

"FOLDOUT" BROCHURE #9900-9075
PRODUCTS BROCHURE #9900-4028

ELECTRIC PRODUCTS



POWER TRANSMISSION PRODUCTS



GEARBOXES: Float-A-Shaft®, Slide-Rite®, DISC CONE CLUTCH; CALIPER DISC BRAKES

"FOLDOUT" BROCHURE #9900-9076
PRODUCTS BROCHURE #9900-4029

ROD & GUIDED ROD STYLE ACTUATORS, HIGH THRUST ACTUATORS, SCREW & BELT DRIVE RODLESS ACTUATORS, MOTORS, DRIVES AND CONTROLLERS

"FOLDOUT" BROCHURE #9900-9074
PRODUCTS BROCHURE #9900-4016



3800 County Road 116 • Hamel, MN 55340 U.S.A.
Phone: (763) 478-8000 • Fax: (763) 478-8080

Toll-Free: **1-800-328-2174**

Email: help@tolomatic.com • <http://www.tolomatic.com>

All brand and product names are trademarks or registered trademarks of their respective owners. Information in this document is believed accurate at time of printing. However, Tolomatic assumes no responsibility for its use or for any errors that may appear in this document. Tolomatic reserves the right to change the design or operation of the equipment described herein and any associated motion products without notice. Information in this document is subject to change without notice.

Visit www.tolomatic.com for the most up-to-date technical information

